

Euclid Investment Grp - Downtown Ontario Luxury
Apartments

Subcontract Change Order No: 1 (INTERIM)

Subcontract #: 230005.009

09/12/2023

Michael Pfister
C.P. Construction Co., Inc.
P.O. Box 1206
Ontario, CA 91762

PROJECT: Euclid Investment Grp - Downtown Ontario Luxury Apartments
SUBJECT: Subcontract Change Order No. 1: Dry Utilities Award

Subject to all the provisions of this Change Order, you are hereby directed to make the following change(s):

<u>CWD PCO #</u>	<u>Description</u>	<u>Amount</u>
4013	Dry Utilities Award – Reference Attached Exhibit A	\$237,724.00

This Interim Change Order is a full and final compromise settlement of any and all known and unknown claims to the date hereof by the Subcontractor against the Contractor, the Owner and the Project, including but not limited to, disputed, undisputed and doubtful claims. Payment by Contractor of the amount agreed under this Interim Change Order shall constitute a full and complete accord and satisfaction of all such claims arising prior to the date hereof and shall constitute payment in full of all such claims and a full release and discharge of Contractor and Owner, and their respective officers, directors, agents, sureties and employees from any and all further liability in connection with the subject project and subcontract. As to all such claims arising prior to the date hereof, Subcontractor expressly waives any and all rights under California Civil Code Section 1542 which provide as follows: "A general release does not extend to claims which the creditor does not know or suspect to exist in his favor at the time of executing the release, which if known by him must have materially affected his settlement with the debtor."

Original Subcontract Value:	\$1,190,925.00
Net Change by Previous Change Orders:	\$0.00
Amount of This Change Order (No. 1):	\$237,724.00
Current Adjusted Subcontract Value:	\$1,428,649.00

When this Change Order is signed by C.P. Construction Co., Inc. it constitutes acceptance by C.P. Construction Co., Inc. that (a) The above price adjustment includes all costs associated with the change(s) including but not limited to direct and/or indirect costs, damages and all overhead and profit for any and all impacts and/or delays arising out of or relating to the changed work on the project, including any schedule extension, compression or revised sequencing; (b) no further adjustment to this price by reason of the change(s) provided herein shall be made; and (c) all the terms and conditions of the Subcontract, except as modified by this and any previous Change Orders, shall remain in full force and effect and apply to the work as so changed.

C.W. Driver LLC

Contractor Signature:

C.P. Construction Co., Inc.

Subcontractor Signature:

Subcontract Change Order No: 1 (INTERIM)

Subcontract #: 230005.009

Contractor Title:

Subcontractor Title:

Contractor Signed Date:

Subcontractor Signed Date:

C.P. Construction Co., Inc.: Please have an officer of the company sign and immediately return to C.W. Driver LLC. No payments on account of this Change Order will be made until C.W. Driver LLC has received the executed copy.

PROJECT: Downtown Ontario Luxury Apartments-320 N Euclid Ave, Ontario Ca.
SCOPE OF WORK: Dry Utilities – Southern California Edison, Socal Gas Co, Ontario Fiber
COMPANY: C.P. Construction CO. Inc
DATE: September 11th, 2023

The following clarifies certain inclusions, exclusions, and other information. This list is not inclusive of all work and is limiting only to the extent exclusions are specifically listed. All items listed are to be furnished and installed unless specifically noted to be furnished only. This exhibit shall supersede all other conditions in this Subcontract and the Contract Documents in the event of specific conflicts between the documents.

Subcontractor is responsible to perform the general scope, to include Dry Utilities work as shown or which can be reasonably inferred by site conditions and the Contract Documents to support said work of Ontario Luxury Apartment Project.

By executing this Subcontract Agreement, Subcontractor represents, warrants and agrees that (i) Subcontractor has extensive experience in the construction of projects of the nature of the Project, (ii) that Subcontractor shall perform all Work, make all observations and judgments and perform such other obligations of Subcontractor described in this Agreement in a manner consistent with the best and most reliable contractors in the construction industry, employing high quality construction professionals and techniques, and (iii) that Subcontractor is generally familiar with and knowledgeable about the components that are properly and customarily included within such a project, including, without limitation manufacturers' recommendations, building standards, and trade practices as to the types and quantities of components, items, systems, materials, and methods of construction to be included in Subcontractors Work on the Project.

I. SCOPE OF WORK: The basic scope of work of this contract includes but is not limited to furnishing, installing, and/or connecting to the following items so that this Subcontractor provides complete and operational Dry Utilities systems:

1. All Dry Utilities Scope of Work – Southern California Edison, Socal Gas Co and Ontario Fiber
2. Complete Scope of Work for Southern California Gas Co Installation. Trenching, maintaining trench plates and backfill for Southern California Gas Company. Provide and install a 4" gas sleeve where the gas main within the close proximity to the grease interceptor. Maintain separations between dry and wet utilities per Gas Co requirements and as noted in the contract documents. No exclusions to the scope of work as shown in the contract documents as CP Construction is the only Subcontractor responsible for the full scope of work and to obtain approval from Gas Co.
3. Complete Scope of Work for Southern California Edison Primary Power. Trenching, conduits, encased concrete ducts, slab box, drywell, accessories, cable trench, diamond plate, cover plate for the primary power for Southern California Edison. Include Cable Trench extending into the building as shown

Subcontractor/Consultant Initials_____

Contractor Initials_____

- on the SCE details. No exclusions to the scope of work as shown in the contract documents as CP Construction is the only Subcontractor responsible for the full scope of work and to obtain approval from SCE. Provide shop drawings showing the cable trench and integration to the building structure.
4. Complete Scope of Work for Ontario Fiber Work – Demo, Trenching, conduits, pull box, accessories, backfill, testing. No exclusions to the scope of work as shown in the contract documents as CP Construction is the only Subcontractor responsible for the full scope of work and to obtain approval from Ontario Fiber. Prior to starting the work, meet and coordinate the final scope of work with CWD, Ownership and City of Ontario Fiber.
 5. Provide and install conduits and pathway for Spectrum and Frontier in the joint trench. Connect to existing conduits sweep outside of the building. (1) 4" for Frontier and (1) 4" for Spectrum. Refer to the drawings included with the Exhibit A for more information on the scope of work.
 6. All requirement for testing and acceptance by the local jurisdiction and contract documents
 7. Potholing onsite and offsite utilities
 8. All excavation, export, trenching, bedding & compacted fill for this work
 9. All saw cut, removal and temporary replacement required for the dry utilities scope of work
 10. Proper shoring, step or slope cuts are to be in compliance with OSHA regulations and the project soils report
 11. No exclusions to items related and required for the dry utilities unless listed in this exhibit as an exclusion
 12. Includes mobilizations as required per the Contract Schedule
 13. Include traffic engineering and encroachment permit requirements for its scope of work. Permit fees is to be reimbursed by the Owner.

II. GENERAL REQUIREMENTS: The following are General Requirements that apply to all work included in this Subcontract:

1. SPECIFICATIONS- Subcontractor includes full compliance and scope coverage with the below listed Specification Section(s) and all other Specification Section(s) that interface and require Dry Utilities work unless modified by this Exhibit. Subcontractor is responsible for Specification Sections that pertain to its scope of work, whether specifically designated in this Exhibit or not.
 - a) Division 1 General Requirements (as applies)
 - b) 32 12 16 – Asphalt Paving (as it applies)
 - c) 32 17 23 – Pavement (as it applies)
 - d) 32 90 00 – Landscaping (as it applies)
 - e) 33 30 00 – Civil Work
 - f) Soils Reports and letters prepare by Geotechnical Group, Inc

Subcontractor/Consultant Initials_____

Contractor Initials_____

g) 07 90 00 Caulking and Sealants as it applies.

2. SCHEDULE OF SPECIFIED SUBMITTALS – The following submittals shall be delivered to the Contractor no later than the below listed dates:

- | | |
|---|---------------------------------|
| a) Product Data | Due: 1 week after NTP |
| b) Shop Drawings | Due: 1 week after NTP |
| c) Closeout: Warranties, O&M etc.
Completion | Due: 4 weeks before Substantial |

Following return receipt of approved submittals, Subcontractor is responsible to promptly notify the Contractor in writing of any questions that are unresolved on approved submittals that will delay fabrication or installation. Unless the Contractor receives such notice within (4) calendar days of return receipt of submittal by Subcontractor, all claims for delays shall be invalid.

Subcontractor shall provide all close out submittals in electronic format. All PDF files should be "TRUE PDF's", meaning no photocopies that are scanned to PDF documents, but actual PDF documents saved from the actual source.

3. SITE VISIT- Subcontractor has reviewed the project site and is aware of and responsible for existing conditions reasonably seen and understood upon a site visit whether shown on drawings or not.
4. COORDINATION- Subcontractor is to coordinate all efforts such as deliveries, manpower, equipment, traffic control, etc. with Contractor's field personnel and all related trades to accommodate Project Schedule in an efficient manner. Provide schedule indicating number of daily deliveries and copies of manifests. A Project Schedule will be provided by the project superintendent and updated as required with input from Subcontractor. Directly coordinate with all subtrades as it relates to this scope of work. Verify dimensional requirements, locations, paths of travel, etc. Where two or more contractors are employed on related work or adjacent work, each shall conduct its operations in such a manner as not to cause any necessary delay or hindrance to the other.
5. TESTING AND INSPECTIONS- It is the responsibility of this Subcontractor to coordinate and schedule all required testing and inspections for this scope of work. Contractor shall be notified of all inspections and tests. Costs of inspection and testing will be by others except for re-inspection and/or premium time costs. Any work that is rejected shall be remedied or removed and replaced in an acceptable manner. No compensation shall be allowed for such removal and replacements. Any work done beyond the lines and grades shown on the plans will be considered as unauthorized and will not be paid.

Subcontractor/Consultant Initials_____

Contractor Initials_____

Includes Health Department Inspection related to grease line and interceptor.

6. SAFETY- Subcontractor shall submit Site Specific JHA, IIPPP & MSDS. Subcontractor will attend all weekly All Hands Meetings (Monday Morning) as required/scheduled by the Project Superintendent. Subcontractor shall provide all abatement certifications, monitoring, signage ventilation, fall protection and work plan to complete this scope of work.

Subcontractor understands that the foreman and/or competent personnel may be replaced upon failure to comply with all safety policies and procedures as required by CAL OSHA or any required safety practices set in place by the General Contractor.

Provide all necessary railings, barricades and safety devices related to site and offsite utilities work in compliance with all Local, State and Federal inspection agencies. Remove all temporary items when no longer required – for it's own scope of work.

7. SAFETY OFFICER - Subcontractor shall provide an onsite "designated safety officer" who shall be responsible for the safety of the Subcontractor's personnel and his associated Subcontractors and will be responsible to fully comply with Exhibit 'B' Item 62.z. This designated safety officer shall make weekly visits during the Subcontractor's work operations and comply with the requirements set forth in Exhibit 'B' Item 62.
8. CHANGES- The Project Manager must approve all Change Orders. Contractor's employee signature on daily work tickets is an acknowledgment of work performed or material used and does not constitute approval of extra work or material. No extra work shall be performed before a Change Order for the work is issued. No modifications to this contract for additional monies shall be issued to this Subcontractor unless the Owner revises the scope of work illustrated in the Contract Documents.
9. MEETINGS - The Subcontractor will provide an English-speaking job foreman at all scheduled weekly meetings and inspections to answer any questions. The job foreman shall represent and commit labor and material for the subcontractor.
10. CONTACTS - Subcontractor must provide their onsite Foreman with a mobile phone. Also, provide 24-hour emergency telephone numbers and contacts.
11. CONSTRUCTION DOCUMENTS - It is Subcontractor's responsibility to insure with the project superintendent, that it has in its possession the latest set of approved plans, specifications, reports, and shop drawings. Subcontractor acknowledges that they have thoroughly reviewed the contract documents and job site conditions and has

Subcontractor/Consultant Initials_____

Contractor Initials_____

anticipated all conditions for a complete job. As such, no extra allowance shall be made for any item that may possibly come under the "Work" for this trade.

12. EXISTING IMPROVEMENTS- Subcontractor assumes responsibility for existing improvements while working in the vicinity of them and will be responsible for checking with local utility companies prior to work commencement for locations of any underground utilities. Includes calling 811 0 Dig Alert prior to work commencement.
13. REASONABLY INFERABLE - For any element of Subcontractor's scope that is reasonably inferable, but not clearly defined on the drawings or in the specifications, Subcontractor shall include a reasonable item, which could be considered industry "standard" for the product or system. Include all work which is consistent with the defined scope of work in this Subcontract and that may be required by the entire set of drawings and specifications. If there is a conflict with any of the Contract Documents, then the more stringent, greater quantity and higher quality shall apply to the benefit of the Contractor and Owner. Subcontractor shall notify Contractor in writing of all inconsistencies in the Contract Documents and subsequent shop drawings immediately upon discovery and prior to fabrication.
14. COMPLETE SCOPE - Subcontractor includes all supervision & safety, materials, taxes, delivery & disposal costs, offloading, transporting, equipment, and fabrication labor for full compliance and scope coverage of this Subcontractor's work with the project schedule, the Subcontract Documents, all applicable codes, Authorities Having Jurisdiction, laws, and industry standards. Subcontractor includes all items consistent with this scope of work that are indicated in the complete set of Contract Documents, Specifications, and addenda. Subcontractor will furnish, deliver, store and transport all materials in scope of work from designated locations by Contractor.

Subcontractor includes all Project Scope of Work-Related Work Items and Trade Disciplines as may be referenced throughout the contract documents by typical notations such as: by: "Contractor," "General Contractor," and similar, etc. that may be noted throughout the entire set of drawings and specifications. The use of the word "provide" shall mean fabricate and deliver.

15. QUANTITIES - Any quantities provided during the bidding, procurement, or ongoing works, of this scope are provided as approximations only and for convenience. This Subcontractor has made its own estimate regarding quantity of material to be provided and handled and has included all associated costs herein. This is a lump sum Subcontract, and all quantities should be per the Contract Documents and no adjustments shall be made for actual quantities of materials.
16. DELIVERY / STAGING- This Subcontractor is responsible for the following:
- A. There is limited to no material storage room onsite. All material delivery and allowed onsite storage/ staging areas must be closely coordinated with C.W.

Subcontractor/Consultant Initials_____

Contractor Initials_____

- Driver. **All deliveries must be scheduled 48 hours in advance and be posted on the "Delivery Schedule" in the Main Construction trailer "Notice Board"**. Any delivery must also be discussed in the previous morning's mandatory "muster" meeting. **Failure to follow these steps will result in the delivery being turned away, with no allowance for an extension in time.** Deliveries of materials will be limited to materials that will be installed onsite within the next two days, unless approved or directed in advanced by C.W. Driver's Superintendent. Subcontractor acknowledges that materials stored onsite may be relocated as needed to facilitate access and the overall construction process, and shall perform this relocation at **no additional cost**. Storage of materials and equipment must be minimized inside the building to maximize access and work efficiency of all trades. All materials stored onsite shall be housed on pallets, equipped with wheels, etc. to facilitate the relocation of items.
- B. Subcontractor understands that any delivery that has not been scheduled with the Contractor that causes any conflicts to the jobsite safety, site egress, site logistics, public access ways or other Subcontractors area of work can be rejected by the Contractor's field personnel.
 - C. Keeping all streets and roads free of debris and repairing any damage caused by its delivery and staging operations.
 - D. Scheduling and coordinating all deliveries, manpower, equipment, traffic control, etc. required for this scope of work with Contractor and other subcontractors. Provide a schedule indicating number of daily deliveries and manifest to the Contractor's construction superintendent on a weekly basis and provide updates at weekly meetings. All deliveries are to be coordinated with Contractor's superintendent. All deliveries are to be on an "on-time" basis.
17. PROTECTION OF EXISTING FINISHES- Protect all existing hardscape, etc. that may be damaged during work operations. Provide protection of existing finishes to remain including installation and maintenance of dust and weather barriers for existing buildings. Subcontractor will be responsible for collateral damage to areas or finishes not scheduled for demolition as a result of his operations. Provide and place a minimum 1/2" thick plywood (as needed) to provide protection of directly adjacent city owned public sidewalks to remain in place. Protect from all tools and equipment/ vehicles that could mark, crack or scratch these areas. All existing city sidewalk around the site are to remain in place. The only sidewalk to be removed are along the parking structure and as required for the new main utilities.
18. TRAFFIC CONTROL- This Subcontractor is responsible for the following:
- A. Providing qualified flagmen, street closures, sidewalk closures, permits, traffic control, etc. for deliveries, transporting on site, pick-ups as required by the project schedule, specifications, job conditions and governing agencies within the jobsite limits.

Subcontractor/Consultant Initials_____

Contractor Initials_____

- B. Include preparation / submission of all paperwork, haul route maps, traffic control plan, applications, etc., as required by the local municipality. It will be this Subcontractor's responsibility to obtain any required permits / approvals.
 - C. Subcontractor shall specifically note that all trucking and/or hauling must accommodate the project's daily schedule. All vehicular traffic must not infringe upon pedestrian or vehicle accessibility on or to the property, i.e. Subcontractor vehicles will have to yield to pedestrian or vehicle traffic flowing to or around the job site. This Subcontractor must provide flagmen for all vehicle deliveries to the job site.
 - D. Provide traffic control and flagmen to escort / walk along all vehicular traffic, related to this bid package's scope of work, from the job site access gates to the public roads bordering the property, and vice versa. Include all necessary flagmen, street closures, sidewalk closures, permits, traffic control, etc. as required by the Specifications, C.W. Driver, job site conditions, and governing agencies.
 - E. Provide flagmen and traffic control as required for equipment transportation and hauling operations. Traffic control/ Flagman shall consist of a dedicated employee or employees, serving only this function, while performing work onsite that involves bringing trucks into, or exiting the Project Site.
19. CODE COMPLIANCE / ADA- This Subcontractor has reviewed all dimensions, assemblies, and clearances noted on the Construction Documents as it relates to ADA accessibility. Any and all discrepancies shall be coordinated, corrected, and called out on the Shop Drawings by this Subcontractor. All fabrication associated with this Scope of Work shall be completed according to all Codes and Authorities Having Jurisdiction. Any areas in question shall be submitted in an RFI prior to the fabrication and installation of the material.
20. LAYOUT- Include layout for all items pertaining to this scope of work. Include coordination with all other related subtrades for necessary dimensions, frame-outs, clearances, etc. All layout is included as required for the completion of the work as defined in this exhibit. This Subcontractor, during work operations, shall protect all stakes and hubs.
21. CONSTRUCTION SCHEDULE- Subcontractor shall issue to the C.W. Driver a detailed Construction Schedule for this trade's work as it pertains to this Project. The Work shall proceed in accordance with the Master Schedule issued with the Construction Documents. This schedule shall be modified from time to time in order to properly coordinate and sequence the work; however, the Subcontractor is responsible to supply sufficient manpower, equipment and material necessary to ensure the duration of time established for the Subcontractor's work is maintained as per the Construction

Subcontractor/Consultant Initials_____

Contractor Initials_____

Documents. The maintenance of the construction schedule is an important and integral part of the project and this contract. If Subcontractor fails to keep his production schedule, all necessary overtime or weekend work to complete his work will be at its cost. Only acts of God will be considered as acceptable excuse for deviation to the schedule.

22. HOLIDAYS - In the event that a Federal, State or Union Holiday occurs on a Monday, Tuesday, Wednesday, Thursday or Friday, then the subcontractor is obligated to work a maximum size crew on the following Saturday so that the Contractors schedule is maintained without delay.
23. SITE CLEAN-UP- Provide daily clean-up of streets, sidewalks, and site walkways during work operations. Including but not limited to street sweeping service. Subcontractor agrees that the job is to be kept free of all debris, trash, excess material, containers, packing materials, lunch trash, etc. The Subcontractor shall remove from its work area all debris resulting from its trade to a central dumpster provided by others, on a DAILY BASIS. Failure to remove the debris will result in the Contractor removing the debris at the Subcontractor's expense. This expense will be billed back to the Subcontractor. Prior to the approval of each subcontractor draw request, the Project Superintendent shall inspect the jobsite. If jobsite cleanliness is not maintained on a daily basis the Contractor may elect to withhold draw funds or processing until the site is cleaned. It shall be the Subcontractor's duty, as a team to maintain a clean jobsite.
24. MOVE-ONS - Subcontractor agrees that multiple move-ons will be required of this to complete this scope of work as directed by the CW Driver. This Subcontractor shall move-on / mobilize to the job site as directed to by CW Driver, unless noted otherwise in this Exhibit]. All associated costs are included in this agreement.
- a) A move-on shall be defined as a job site mobilization [occurring either at the beginning of the Project, i.e. before this Contractor has first mobilized to the job site, or after a move-off] of material, equipment and man-power to complete a scope of work. A move-off is when a scope of work has been completed with no further work scheduled for this Contractor to start within the next two (2) calendar weeks, and all equipment, materials, and man-power have been demobilized [removed from the job site].
25. SITE ACCESS/PARKING- The Subcontractor's employees, its Sub-Subcontractors and suppliers shall enter/exit at the designated locations on the site logistics plan. Due to lack of space onsite, there will be parking for the trades at the parking structure next to the project. Material storage will be coordinated with C.W Drivers Superintendent

Subcontractor/Consultant Initials_____

Contractor Initials_____

26. HOISTING- Hoisting of all materials. Subcontractor shall deliver and stock materials per sequencing of rooms or areas as directed by Contractor. Material shall be fabricated to allow for stocking through doorways and/or opening that will exist at the time of jobsite delivery. Access to an elevator for material transport is not guaranteed. All hoisting equipment will be the responsibility of this subcontractor.
27. DIMENSION COORDINATION- Subcontractor shall be responsible to properly coordinate the locations and dimensional requirements of all subcontract work items, with the project surveyor (survey layout provided by the Contractor), and all other sub-trades. This Subcontractor is required to resolve any conflicts, incorrect locations, utility crossings (gravity flow and pressurized piping shall take precedence), clearances, and similar types of circumstances with the appropriate sub-trades prior to the commencement of work.
28. SURVEY REQUESTS - Subcontractor to submit staking request 48hrs prior to the start of work.
29. PRE-EXCAVATION DOCUMENT REVIEW MEETING- Prior to the commencement of all excavation work, Subcontractor shall meet with C.W. Driver and the Owners facility staff to identify all existing utilities that may be affected throughout the course of construction. This meeting will include a review existing as-Built drawings, discussions with owner facility staff and a visual inspection of the site and adjacent structures to identify building points of connection and shut down locations, The Subcontractors annual excavation permit and completed activity notification form to Cal/OSHA will also be reviewed.
30. UTILITY EXCAVATION HAZARD PLAN- A hazard plan is to be developed highlighting existing utility locations including any as-built information that can be obtained. Shut-off valve and switch locations are to be identified in the plan. In addition, valve and switch location are to be identified in the field and labeled for quick shut downs in the event of a utility strike. The Plan shall be posted in the Construction Site Office for quick reference. Proper utility shut off keys are to be accessible at all times.
31. PRE-DIG PERMIT- A pre-dig permit shall be completed prior to utilizing equipment to excavate. C.W. Drivers Project Superintendent and the Subcontractor Supervisor shall complete the C.W. Drivers pre-dig permit to ensure all identified step have been taken. The Pre-dig Permit shall remain active for the duration of the work activity it applies to.
32. EXCAVATIONS- Based on the hazard level of the existing utilities, the type of locator services and methods shall be determined. Saw cutting shall be set no greater than 1/4inch below thickness of surface material. Hand digging is mandatory until utility is located when digging within three feet (horizontally and vertically) of a known utility

Subcontractor/Consultant Initials_____

Contractor Initials_____

location. Proper shoring, step or slope cuts are to be in compliance with OSHA regulations and the project soils report. Over excavation, trench excavation, backfill, and re compaction will be per the plans and specifications, and recommendation of Soils Report.

33. LOCAL REQUIREMENTS- Comply with all City, State, Local Jurisdictional Agencies, AQMD, California Regional Water Quality Control Board (SWPPP), and CAL/OSHA requirements.
34. TRADES COORDINATION- Subcontractor is responsible for coordination with other trades. Each Subcontractor upon written request by another Subcontractor must deliver the requested coordination documents to the requesting Contractor within 48 hours. This includes but is not limited to various types of field conditions, submittals, schedule coordination, material delivery, etc. where one Contractor's scope affects or is affected by another Subcontractor's scope. Subcontractors are generally instructed to rely only on "Approved Documents". Where approved submittals are not essential to Subcontractor's work then non-approved submittals can be utilized as construction schedule dictates at this Subcontractor's discretion.
35. MATERIAL'S ESCALATION - Subcontractor fully acknowledges and understands the current volatility with material increases and has made provisions within this Subcontract amount to bear all risk associated with future unforeseen material increases. Owner nor Contractor will entertain additional compensation requests for any potential material escalation unless the project is delayed by the Owner.
36. PHASING- It is agreed and understood that that the Project is broken into numerous phases, cycles, and shifts. Multiple areas will be under construction simultaneously requiring multiple crews, shifts, etc.

III. SPECIFIC INCLUSIONS: The following items are to be furnished and installed as part of the Dry Utilities Scope of Work and are specifically included in the scope of this Work Order:

1. COMPLETE SYSTEM- Subcontractor shall complete all Dry Utilities work currently shown, inferred, or which can be reasonably anticipated to provide a complete working system. No exclusion from or limitation in plans and specifications shall be reason for omitting any item necessary to complete the work. No change orders shall be issued to this Subcontractor unless the Owner revises the scope of work shown on the Contract Documents or there are required field changes agreed upon between contractor and subcontractor.

Subcontractor/Consultant Initials_____

Contractor Initials_____

2. SOUTHERN CALIFORNIA EDISON SCOPE OF WORK - Subcontractor will furnish and install all turn-key scope of work for the Southern California Edison. Including conduits, encased duct back, slab box for the transformer, cable trench, cover plate, mandrel & rope, all required to complete the scope of work, and to obtain approval from Southern California Edison. Including all removal and replacement required for the work.
3. SOUTHERN CALIFORNIA GAS COMPANY SCOPE OF WORK - Subcontractor will furnish and install all turn-key scope of work for the Southern California Gas Company Scope of Work. Including trenching, maintaining trench plates until receiving Gas Co sign-off, backfill, maintaining clearance, all required to complete the scope of work, and to obtain approval from Socal Gas Co. Including all removal and replacement required for the work.
4. ONTARIO FIBER SCOPE OF WORK - Subcontractor will furnish and install all turn-key scope of work for the Ontario Fiber. Including demolition, trenching, backfill, all materials, accessories, conduits, encased duct back, mandrel & rope, all required to complete the scope of work, and to obtain approval from Ontario Fiber. Including all removal and replacement required for the work.
5. SAFE-OFF OF EXISTING UTILITIES- The following identifies existing utilities that must be located and safe-offed prior to demolition and excavation. Review and follow the project schedule, and as directed by the Project Superintendent.
 - a. IRRIGATION – By the Utilities Subcontractor/This Subcontractor
 - b. ELECTRICAL – By Electrical Subcontractor. (Power disconnected to light poles, sight lighting, marque signs and the like.)
 - c. FIRE WATER – By Utilities Subcontractor/This Subcontractor. (Fire lines will remain live during demolition and excavation. Protect lines to remain.)
 - d. WATER - By the Utilities Subcontractor/This Subcontractor. (Water lines will remain live during demolition and excavation. Protect lines to remain.)
 - e. SEWER - By the Utilities Subcontractor/This Subcontractor. (Sewer lines will remain live during demolition and excavation. Protect lines, valve boxes, manholes and the like)
 - f. CABLE – Demo and remove conduit by Demo Subcontractor.
 - g. TELEPHONE – Demo and remove conduit by Demo Subcontractor.
6. UTILITY LOCATING – Subcontractor is to verify all locations of their installation/s by

Subcontractor/Consultant Initials_____

Contractor Initials_____

potholing prior to start of work. This includes calling 811- DigAlert prior to work commencement.

7. UNDERGROUND WORK- Include all demolition, excavation and backfill work as required for systems included in this Subcontract. All excavation, bedding materials, backfill and compaction shall be pursuant to requirements of specifications, soils report, soils inspector and drawings. All areas of excavation shall be returned to existing grades prior to commencement of work. Include handwork/grading around conduits, vaults, etc.
8. BACKFILL- Subcontractor shall perform all excavation and backfill work as required for underground site utility systems included in this Subcontract. All excavation, bedding materials, backfill, and compaction shall be in accordance with the requirements of the Contract Documents, the soils report, soils inspector and the notes found on the Civil drawings. All areas of excavation shall be returned to existing grades at the conclusion of this Subcontractors work. Include handwork/grading around manholes, catch basins, piping, etc. Subcontractor will be responsible to return all disturbed or damaged building pads to blue-top (+/- 0.1').
9. BEDDING- Include all excavation and backfill work as required for systems included in this Subcontract. All excavation, bedding materials, backfill and compaction shall be pursuant to requirements of specifications, soils report, soils inspector and drawings. All areas of excavation shall be returned to existing grades prior to commencement of work. Include handwork/grading around piping, vaults, etc.
10. SPOILS GENERATED- Include the cost to export all spoils generated from onsite and offsite utility scope of work. General Contractor may direct this Subcontractor to stockpile the spoils if required to balance the site. This includes removal of any base rock or sand spoils above what is needed to complete the scope of work. Sand or base rock can only be stockpiled as directed or authorized by the Project Superintendent.
11. UTILITY TRENCHING- Include all saw cutting, coring, minor demolition and removal of debris from the site as required to install the Utility scope of work in areas required by the contract documents. **In all cases, this Subcontractor shall properly layout and review the extent of all such work with the Contractor prior to start of any work.** Subcontractor shall adjust all manholes, clean-outs, and valve boxes installed by this Subcontractor to finish grade after completion of AC paving work. Existing items not included. Provide, around a manhole, a concrete base ONLY (not mortar) should be poured. Acceptable minimum of 2000 PSI per plans and standards.
12. SITE REVIEW- Subcontractor will walk the site with Contractor to establish existing

Subcontractor/Consultant Initials_____

Contractor Initials_____

conditions (i.e. damaged curbs, raveling, etc.) prior to commencing work.

Document/photograph existing conditions prior to work. Subcontractor will remedy any damage resulting from Subcontractor's work.

13. DEWATERING - Dewatering as may be required, will be performed by Subcontractor including muck out due to rain events. Ground water excluded.
14. DEBRIS - Subcontractor shall appropriately cap all water, sewer, and storm drain lines to prevent entry of debris.
15. TRACER WIRE – Provide tracer wire/caution tape/colored concrete as specified.
16. CONCRETE ENCASEMENT AND ANCHORS- Provide concrete anchors, thrust blocks and encasement for underground piping as required. Includes encasement required by the local jurisdiction.
17. MISCELLANEOUS REQUIREMENTS- Furnish and install miscellaneous valve boxes, frames and grates, manhole covers and frames as required by the Contract Documents.
18. OPEN TRENCHES- Provide and maintain trench plates as required for access across open trenches during underground plumbing work. Subcontractor shall provide, monitor and maintain shoring systems in open trenches excavated in the process of this scope of work. Subcontractor shall have a competent person continuously monitor open excavations during any underground work by this subcontractor.
19. FINISH ELEVATIONS- Subcontractor shall set to proper elevation any site utility appurtenances to be cast in slabs and coordinate with floor finishes for elevation.
20. SWPPP- Comply with Storm Water Pollution Prevention Plan requirements (SWPPP). SWPPP measures shall be implemented by others but this subcontractor's work includes any additions or modifications to the existing SWPPP required as a result of this work. Includes protection and maintain existing storm drain inlets with filter fabric, sandbags, and/or gravel for storm water management protection.
21. AS-BUILTS- On a weekly basis and after completion of all Site Utility work, provide as-built information including register and layout changes, and elevation information. Submission of Monthly As-built drawing and updates is a requirement for progress payments. Include note
22. SHORING- This Contractor shall furnish and install any, and all, shoring that may be required to achieve the scope of work of this bid package. Note, all shoring must be

Subcontractor/Consultant Initials_____

Contractor Initials_____

engineered with an Engineer's stamp of approval prior to erection / installation. This Contractor must provide four (4) copies of these wet stamped and signed engineered shoring drawings to C.W. Driver upon request.

23. DUST CONTROL- Dust control while onsite for dry utilities will be performed by this Subcontractor. Site will be sufficiently wetted to prevent the need for off hours dust control at the end of each workday. Subcontractor will supply, at its cost, all water trucks, labor, materials, and equipment in order to satisfy the concerned governmental agencies and General Contractor for dust control as required through the duration of its performance of this work and shall be responsible for any damages or claims which may arise as a result of its, or its forces' negligence to provide adequate dust control.
24. TEMPORARY POWER – There will be no temporary power provision provided by CWD. Subcontractor to provide own temp power required for the relocation of their utilities work.
25. TEMPORARY WATER – Subcontractor shall provide connection for a temporary water to the site for the project trailers. See Site Logistics Plan for the locations of the temporary water.

IV. CONSTRUCTION ACTIVITY MILESTONES: Notwithstanding Subcontractors obligation to comply with the Project Schedule. Subcontractor agrees to comply with the following Construction Milestones:

1. CONSTRUCTION ACTIVITY MILESTONES- Notwithstanding Subcontractors obligation to comply with the Project Schedule. Subcontractor agrees to comply with the following Construction Milestones:
 - a. Reference project master project schedule and updates.
2. MOVE-ON'S- Multiple move-on's are included as required by the contract schedule and coordination with other trades. The project schedule will be updated according to project progress throughout the project. The master and 4-week look ahead schedules will be reviewed at weekly construction meetings.
 - i. First Move-on upon Site Mobilization and Fencing:
 1. Pothole Existing Site Utilities
 2. Existing Utility Safe Off/Cut & Cap
 3. Set up Temporary Water
 - ii. Second Move-on upon completion of demolition and pad certification. This may be completed as part of the first move-on upon approval and coordination with the Project Superintendent:
 1. Traffic Control
 2. Demo and installation of wet utilities on East C Street

Subcontractor/Consultant Initials_____

3. Patch back and Permanent Replacement of existing conditions
4. Demo and installation of wet utilities on North Lemon Avenue
5. Patch back and Permanent Replacement of existing conditions
6. Demo and installation of SCE Electrical Scope of Work
7. Demo and installation of Telecom/Ontario Fiber Scope of Work
8. Excavate and install underground Storm Chamber
9. Gas Company Trenching and Backfill
10. Permanent repair of public sidewalks may require a separate mobilization. The cost of the work is included in the base bid

iii. Third Move-on upon completion of building exterior:

1. Complete site storm drains
2. Final connection of the storm drains to the 5' outside of the building
3. Adjust manholes, valves, finishes
4. Clean Storm Drain System
5. Camera for final inspections

V. UNIT COSTS AND ALLOWANCES

The following unit costs may be included in the scope of this Subcontract by Change Order. These prices are inclusive of all labor, material, equipment, burden, travel time, office support time, overhead, profit and other facilities required to perform the work. The unit rate to the Scope of Work of this Subcontract shall be in accordance with the terms of the contract documents and are subject to the final approval of the Owner. Ownership shall request additional documentation to provide all labor rates as noted. As standard in the Industry, the daily equipment rates shall be revised lower if they exceed weekly or monthly time frames.

		Regular Time	Over Time	Double Time
A.	Foreman	\$____/hr	\$____/hr	\$____/hr
B.	Journeyman	\$____/hr	\$____/hr	\$____/hr
C.	Apprentice	\$____/hr	\$____/hr	\$____/hr
D.	Laborer	\$____/hr	\$____/hr	\$____/hr
	Daily	Weekly	Monthly	
E.	Equipment	\$____	\$____	\$____

VI. ALTERNATES The following alternates may be added to the Subcontract Scope at the sole option of CWD. If authorized by CWD, Subcontractor shall furnish and install the alternate work listed below. The Scope of Work listed below includes all labor, materials, supervision, taxes, move-in and mobilization costs, insurance licenses, bond premiums, benefits, profit overhead and any other applicable costs. These alternates are subject to the terms of the Contract documents and to the final approval of the Owner.

Subcontractor/Consultant Initials_____

a) None.

VII. COST BREAKDOWN These prices are inclusive of all labor, material, equipment, overhead, profit, burden and other facilities required to perform the work.

1.	All Dry Utilities System	\$237,724
Total:		\$237,724


VIII. EXCLUSIONS: The following items are specifically excluded from the scope of this Subcontract.

a. Permit fees are by owner.

END OF EXHIBIT "A"

Subcontractor/Consultant Initials_____

Contractor Initials_____

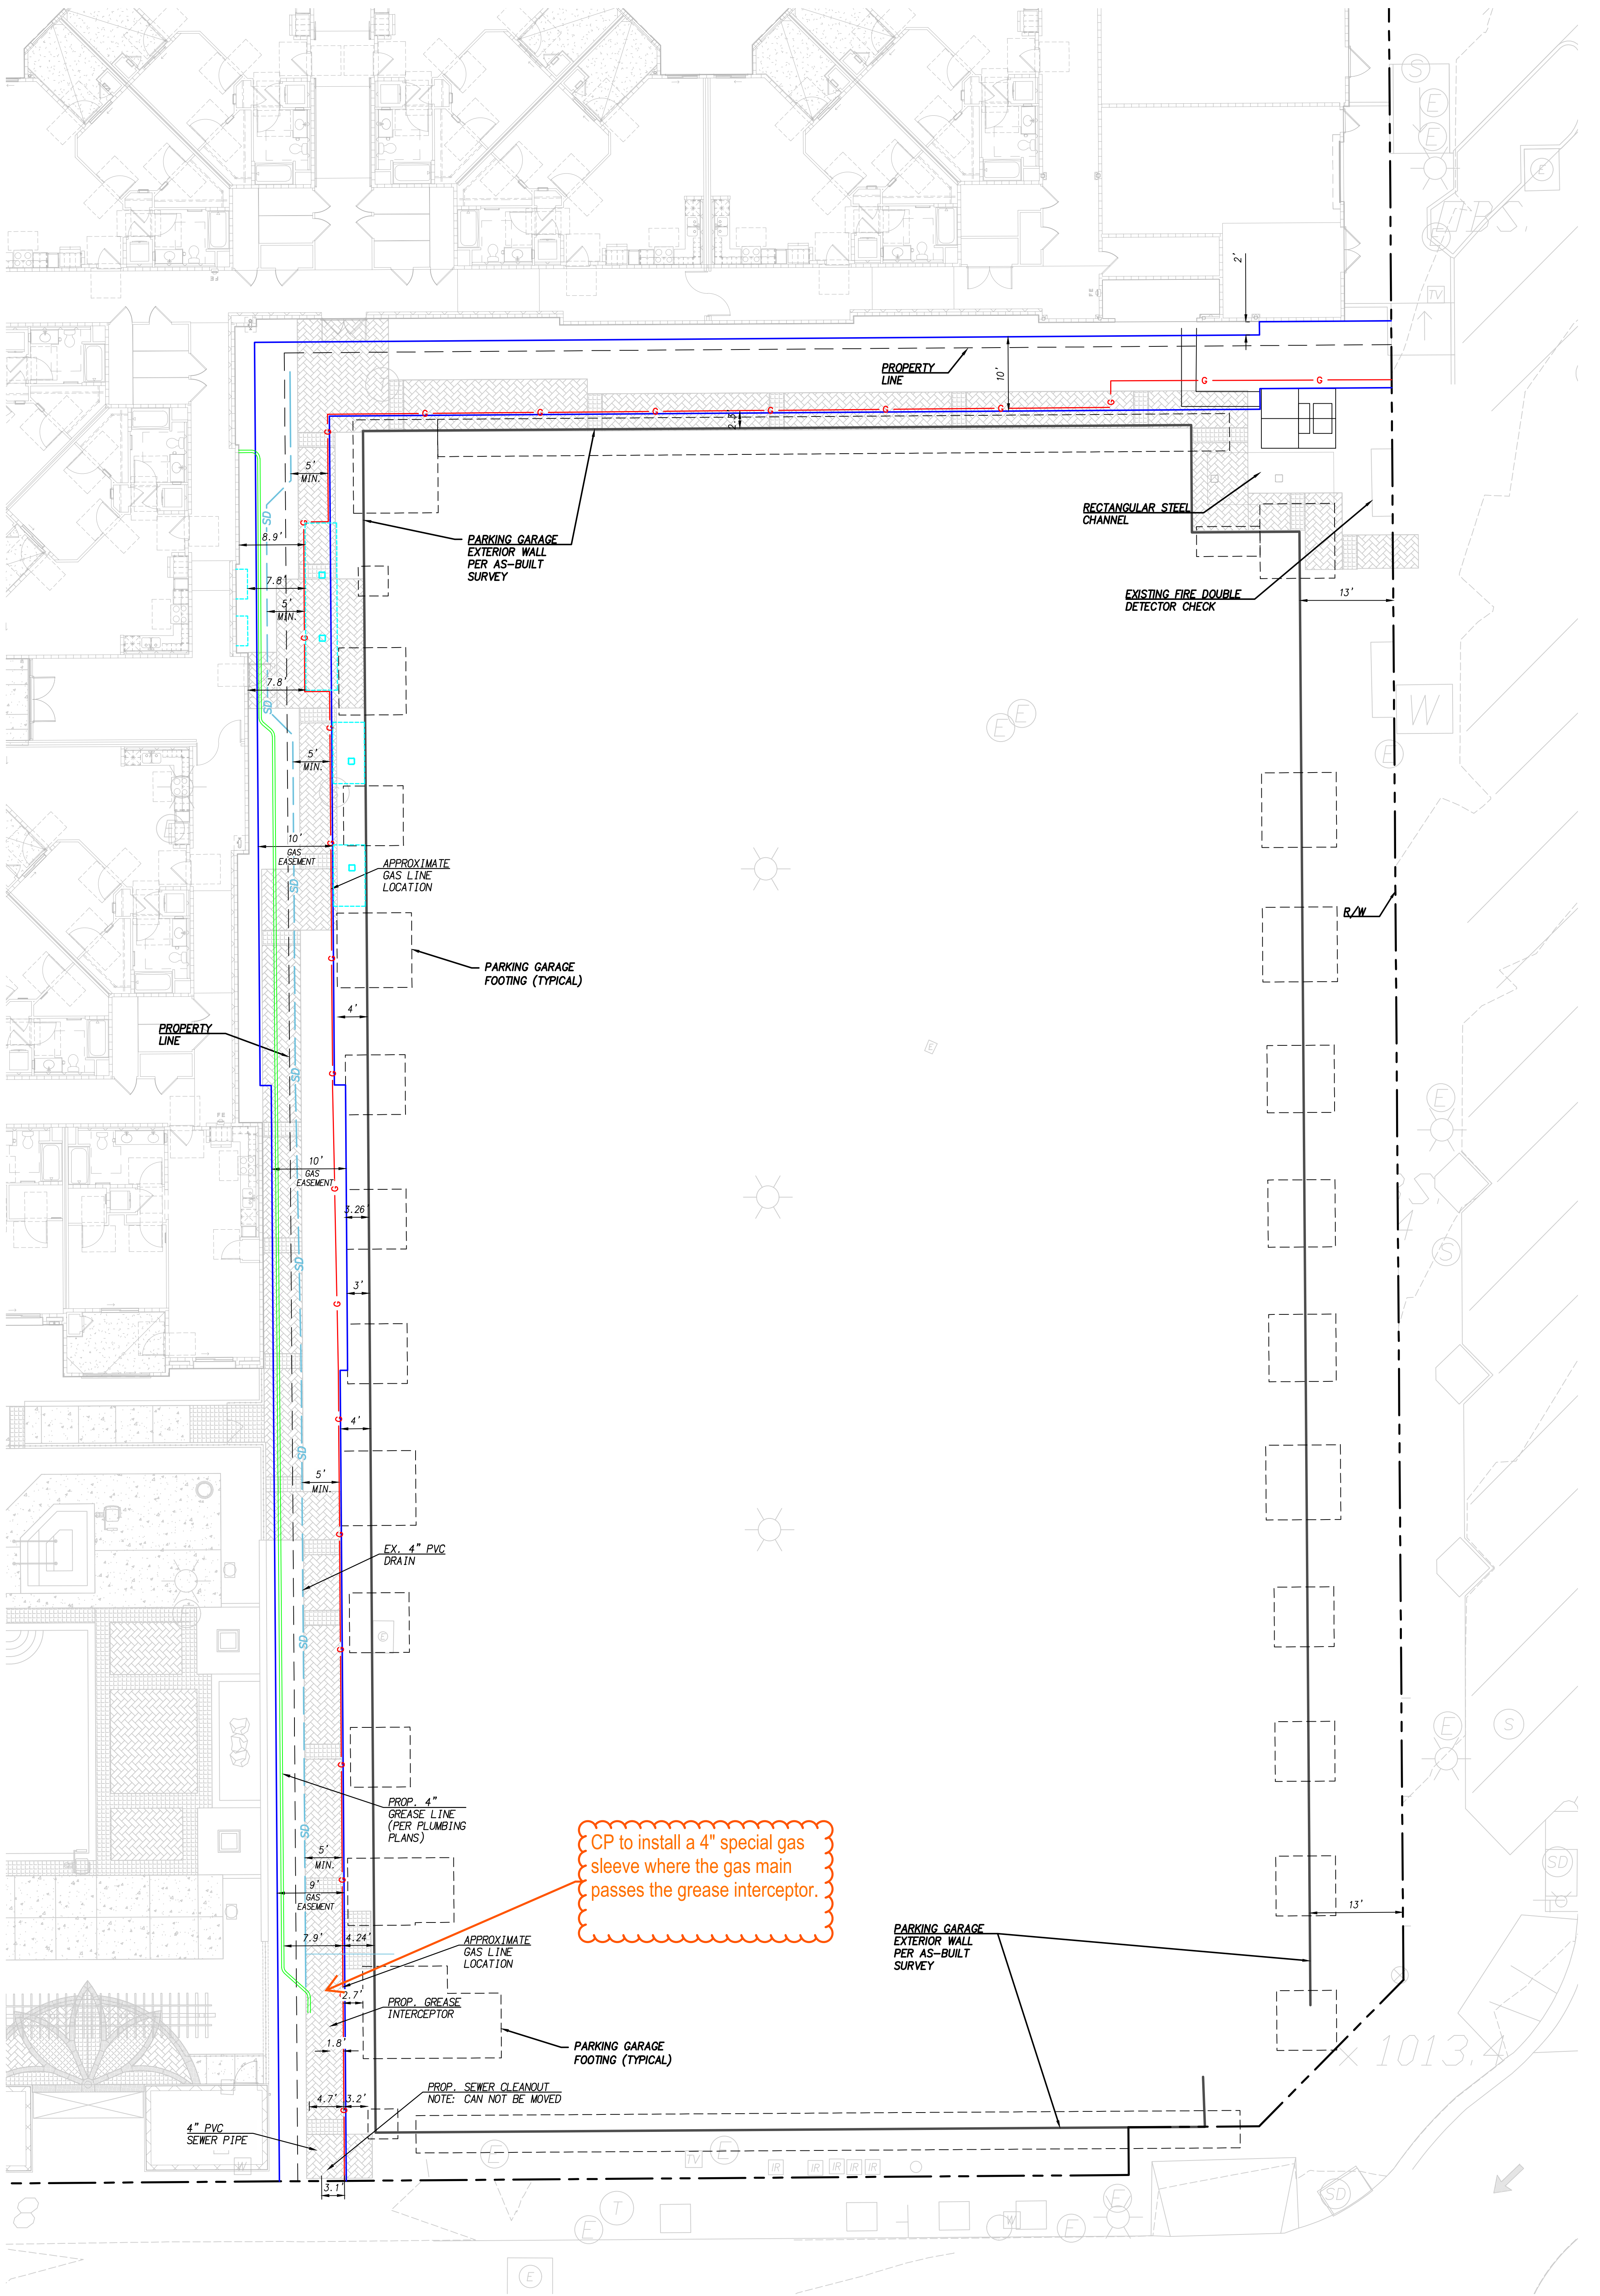


GAS EASEMENT UTILITY LOCATION (8-23-23)

GAS CO EXHIBIT FOR CONNECTIONS TO EXISTING MAIN GAS LINE ON C STREET AND NORTH LEMON AVENUE - FOR INSTALLATION WITHIN THE PROPERTY LINE, REFER TO GAS EASEMENT UTILITY LOCATION DATED 8/23/23

services should be installed per the predetermine location. risers are always to the left of the manifold.

Service stubs are not to scale on print
For accountability and general location only.
Stubs are installed perpendicular to our main and terminate 3' from final riser location.

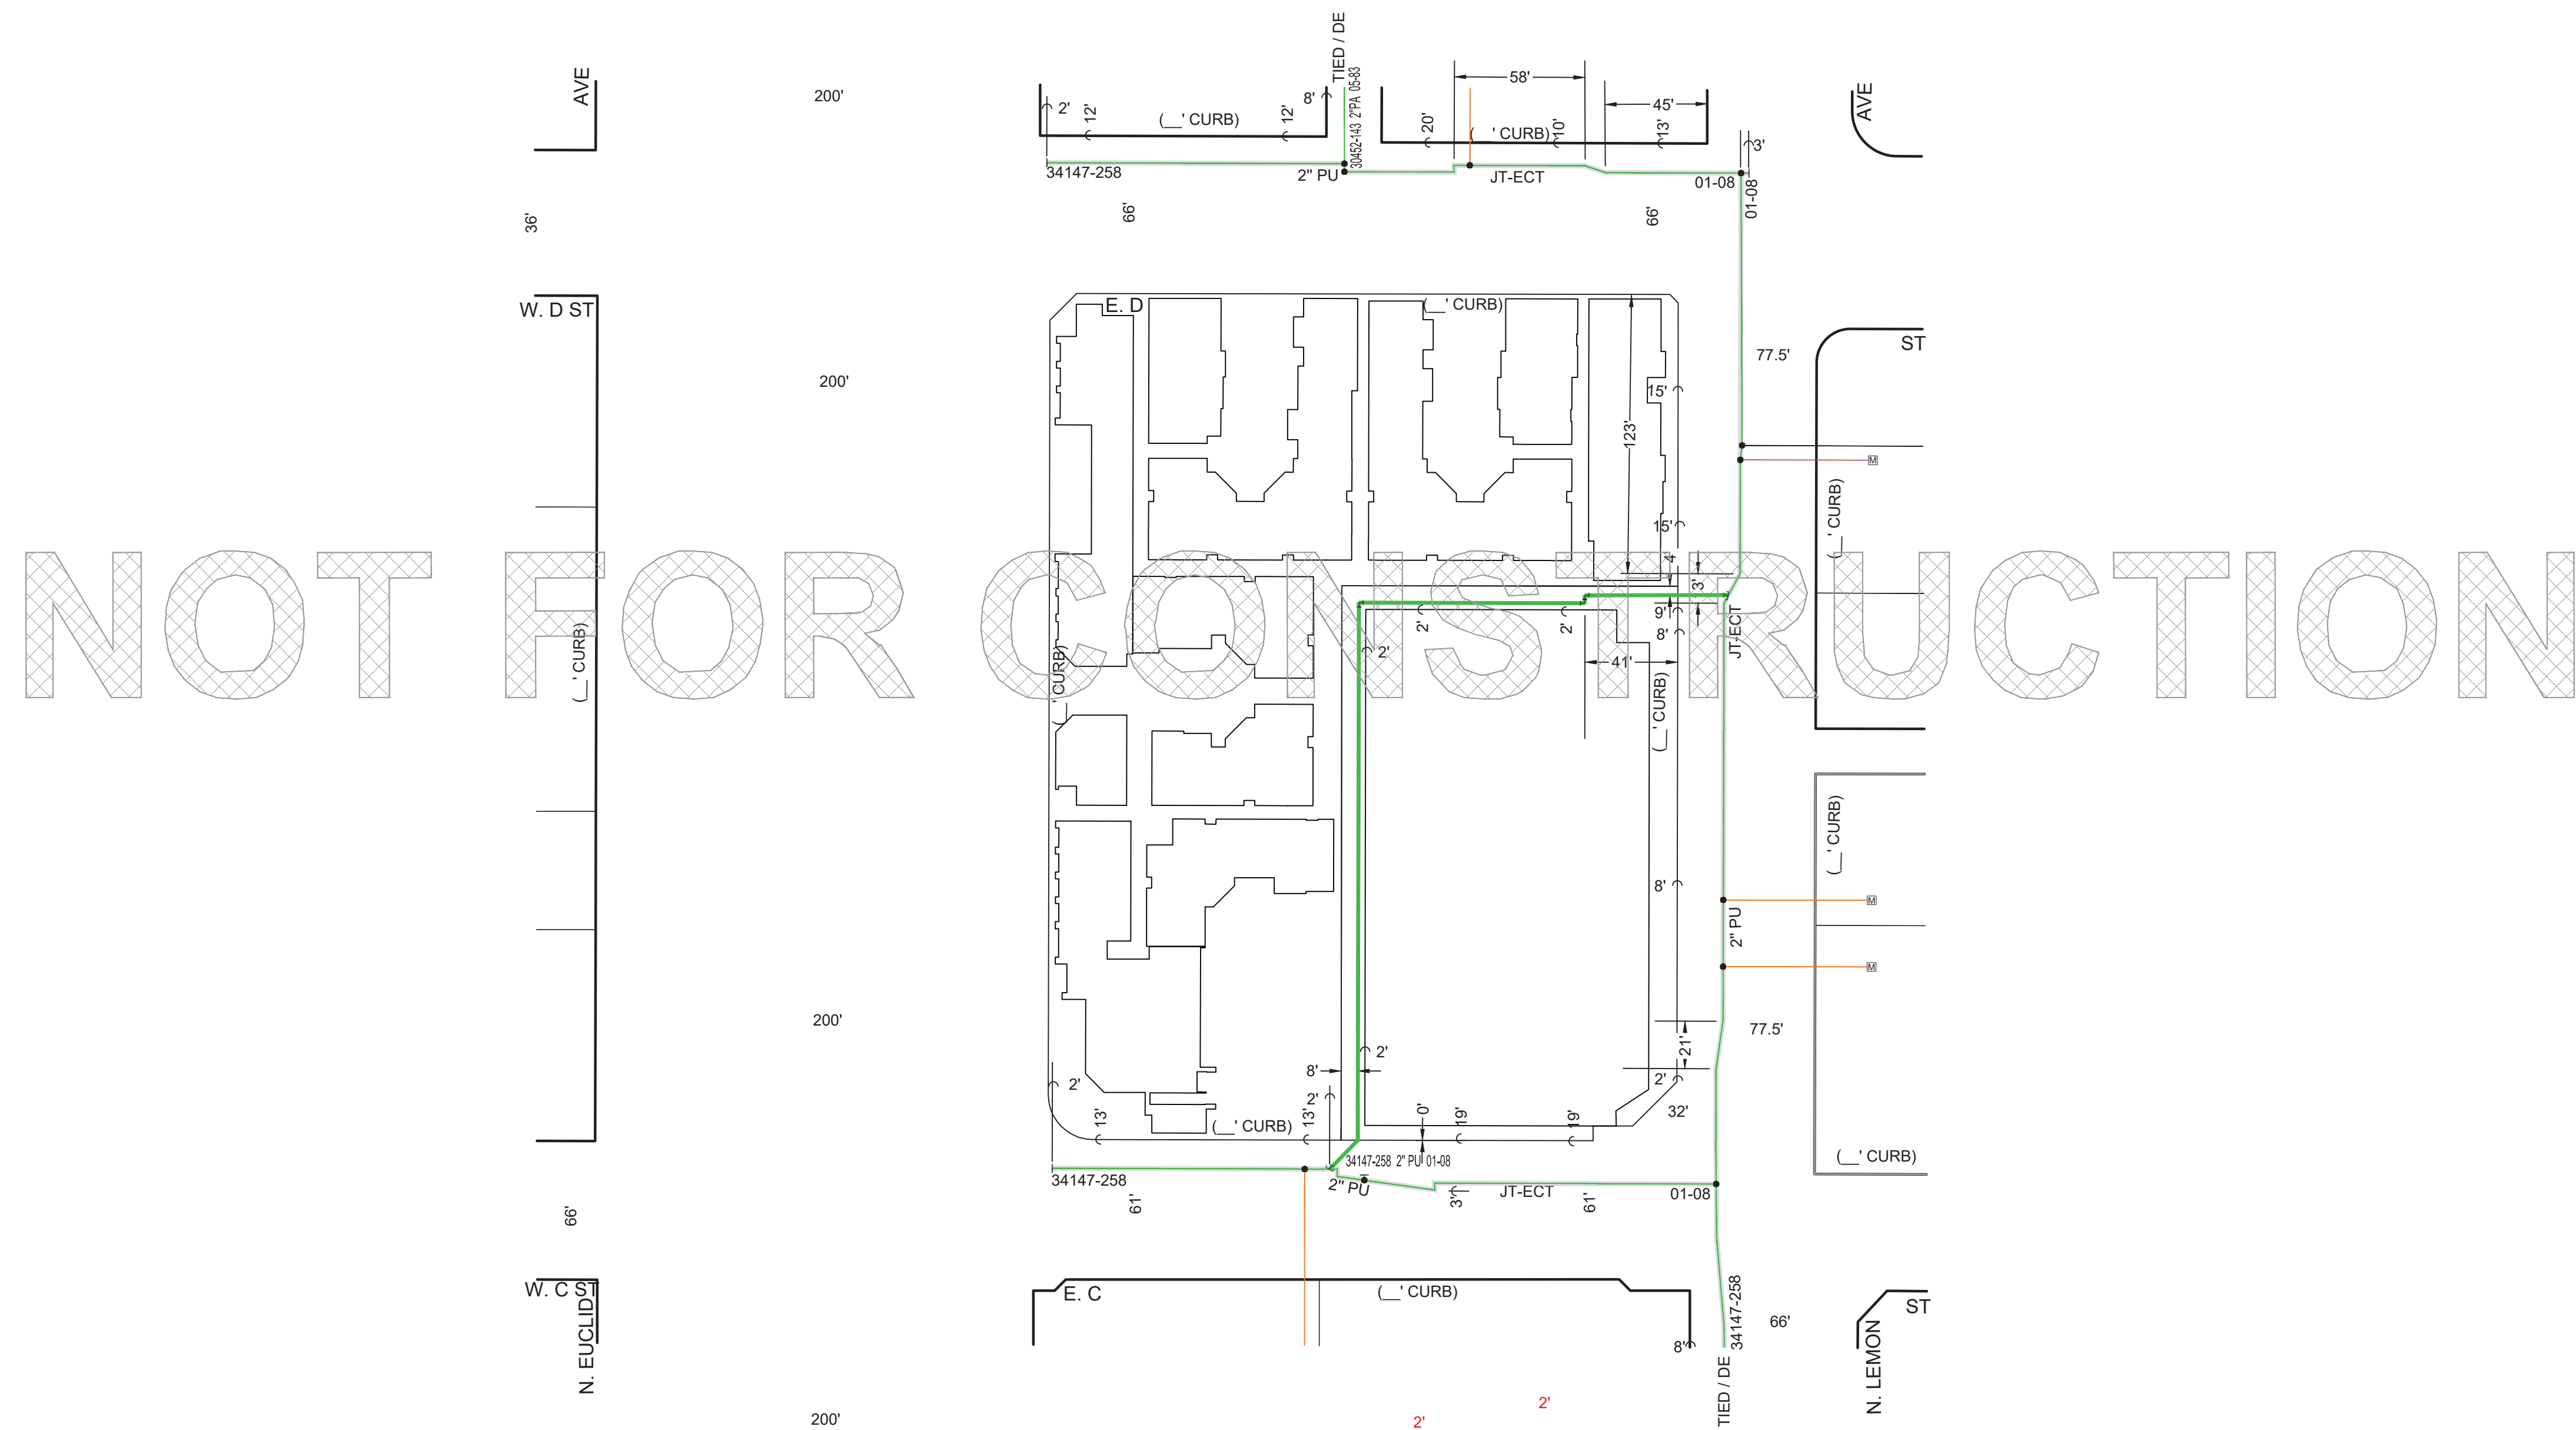

HAND DIG OVER EXISTIGN FACILITIES

Excavations to be center over existing main and new main trench. One foot on either side of existing main.



SUBSTRUCTURE DRAWING

PROJECT NUMBER: 5314205

WIRE CENTER: 70103 - ONTRCAXF

TRACT - 18029-3 - 144 MDU's, 1 HM, & 6 RETAILS


EUCLID INVESTMENT GROUP, LLC

346 N. EUCLID AVE (DOWNTOWN APTS)

ONTARIO, CA

CONSTRUCTION COORDINATOR:
HUMBERTO RAMIREZ 1-(951)672-1596

CONSTRUCTION INSPECTOR:
DAVID FIOL 1-(909)837-8273

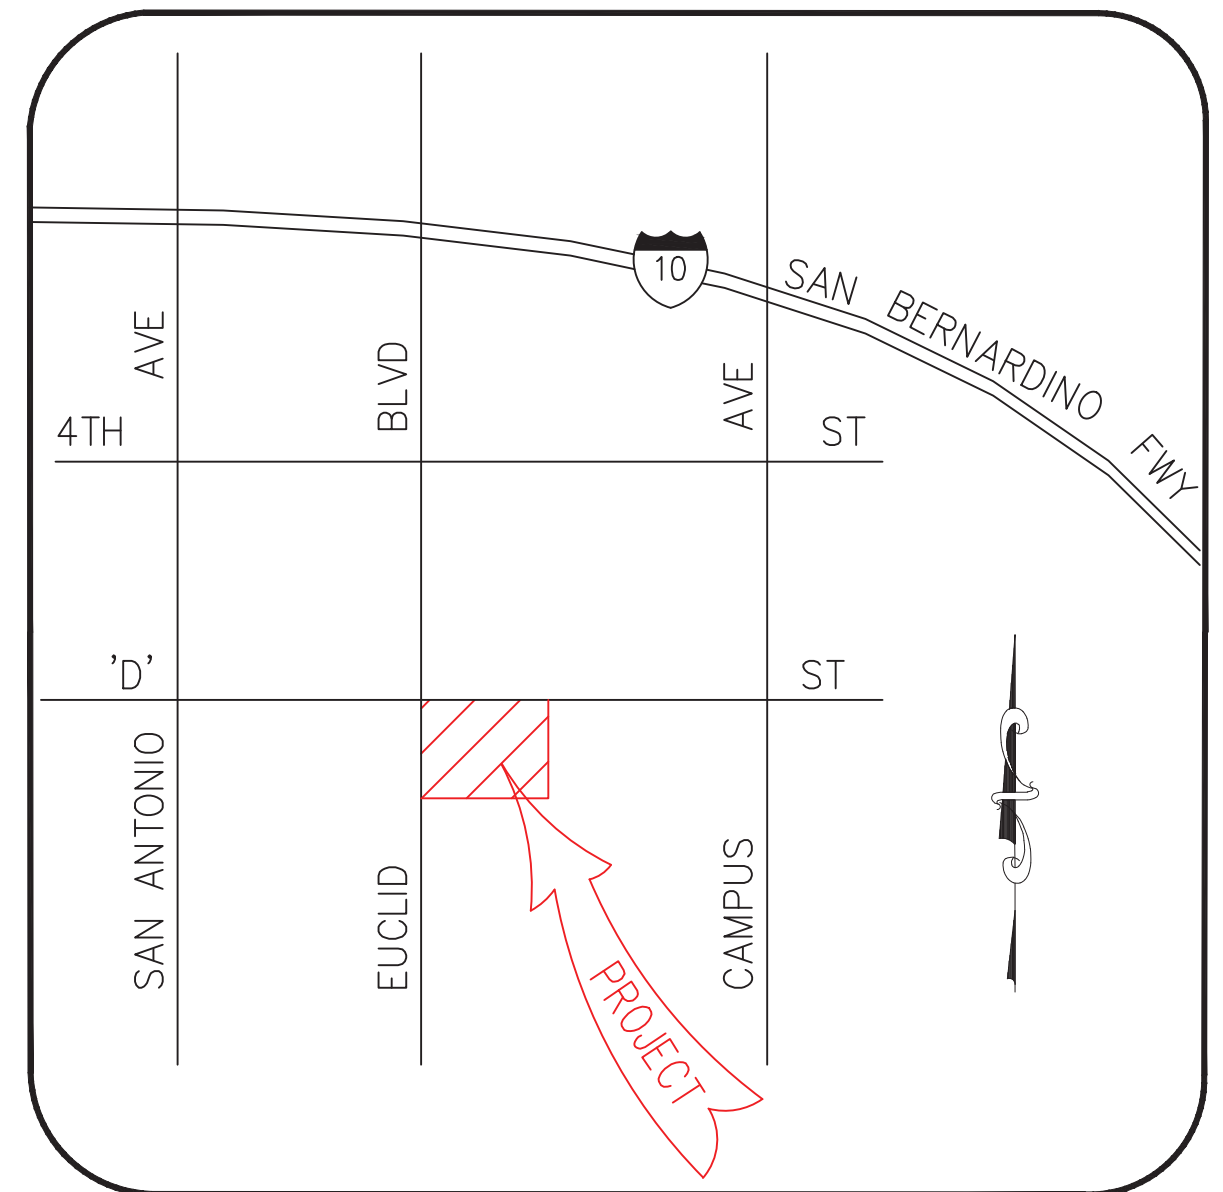

VICINITY MAP

N.T.S.

1. DEVELOPER/CONTRACTOR SHALL PROVIDE ALL TRENCHING AND BACKFILL OF THIS SYSTEM.
2. A MINIMUM OF 30" BELOW GUTTER GRADE MUST BE MAINTAINED.
3. WHEN TELEPHONE IS INSTALLED IN THE SAME TRENCH AS ELECTRICAL POWER A MINIMUM OF 12 INCHES OF WELL PACKED EARTH OR 3 INCHES OF CONCRETE MUST BE MAINTAINED.
4. TELEPHONE SHALL BE KEPT CLEAR OF ALL OTHER UTILITIES (GAS, SEWER OR WATER) AS REQUIRED BY GOVERNMENT AGENCIES.
5. DEVELOPER/CONTRACTOR IS RESPONSIBLE FOR OBTAINING NECESSARY EXCAVATION PERMITS AND FOR ANY INSPECTION FEES.
6. DUCTS MUST BE SHADED WITH SAND AND BACKFILLED WITH MATERIAL CONTAINING NO ROCKS.
7. TRENCHER WILL FURNISH ALL "TIES" FOR PULLBOXES AND MANHOLES; AS WELL AS WALL-TO-WALL MEASUREMENTS. MEASUREMENTS TO BE VERIFIED BY A FRONTIER INSPECTOR.
8. UTILITY BOX(ES) 2'X3' STRONGWELL AND CHANNEL HANDHOLES/UTILITY BOXES WILL BE PROVIDED BY FRONTIER. COVERS MARKED "FRONTIER" OR "TEL." PROVIDE 8 FT GROUND ROD DRIVEN 7 FT INTO GROUND ON 6 INCH BED OF GRAVEL.
9. PROVIDE WEATHERPROOF HOUSINGS, NEMA4 RATED, UL LISTED AND TAGGED, PLYWOOD BACK - BOARD MUST RESIDE WITHIN, AND GROUNDED WITH #6 INSULATED COPPER WIRE (SOLID REQUIRED) ACCESSIBLY CLAMPED COMMON TO POWER SYSTEM GROUND WITHIN 20 FT OF CABINET.

FRONTIER INSPECTOR CONTACT: DAVE FIOL 909-837-8273

OWNER/DEVELOPER:
HUTTON COMPANIES
ATTN: CHRISTOPHER J. FELIX 714-921-1200
2400 SOUTH STATE COLLEGE BLVD
ANAHEIM, CA

SUBSTRUCTURE TO BE PLACED

— TRENCH = 110 FT

○ NUMBER OF DUCTS TO PLACE IN OPEN TRENCH

← SERVICE LATERALS/SERVICE DROP = 0 FT

PLACE 4" PVC = 110 FT

PLACE 2" SD = 0 FT

PLACE 3'X3' PADS = 0

PLACE 3'X5' HANDHOLES = 0

PLACE 2'X3' HANDHOLES = 0

PLACE 17"X30" HANDHOLES = 0

**MAP IDENTIFIER**

GENERAL CONSTRUCTION NOTES

1. A MINIMUM OF 30" BELOW GUTTER GRADE MUST BE MAINTAINED.
2. WHEN TELEPHONE IS INSTALLED IN THE SAME TRENCH AS ELECTRICAL POWER A MINIMUM OF 12 INCHES OF WELL PACKED EARTH OR 3 INCHES OF CONCRETE MUST BE MAINTAINED.
3. TELEPHONE SHALL BE KEPT CLEAR OF ALL OTHER UTILITIES (GAS, SEWER OR WATER) AS REQUIRED BY GOVERNMENT AGENCIES.
4. DEVELOPER/CONTRACTOR IS RESPONSIBLE FOR OBTAINING NECESSARY EXCAVATION PERMITS AND FOR ANY INSPECTION FEES.
5. DUCTS MUST BE SHADED WITH SAND AND BACKFILLED WITH MATERIAL CONTAINING NO ROCKS OVER... IN DIAMETER.
6. MEASUREMENTS TO BE VERIFIED BY A FRONTIER INSPECTOR.
7. UTILITY BOX(ES) 2'X3' STRONGWELL AND CHANNEL HANDHOLES/UTILITY BOXES TO BE PROVIDED AND PLACED BY FRONTIER. COVERS MARKED "FRONTIER" OR "TEL." PROVIDE 8 FT. GROUND ROD DRIVEN 7 FT INTO GROUND ON 6 INCH BED OF GRAVEL.

KEY MAP

THIS SHEET




LEGEND

	HUB LOCATION
	EXISTING PED LOCATION
	EXISTING HANDHOLE
	NEW HANDHOLE
	EXISTING MANHOLE
	VERIZON UTILITY POLE
	JOINT UTILITY POLE
	NEW SUBDUCT
	NEW SERVICE LATERAL



REV. #:	REV. DATE:	REASON FOR CHANGE	ENGR:	QC'D:	CADD:

TRACT 18029-3 - SUBSTRUCTURE DRAWING			
N EUCLID AVE & LEMON/D ST/C ST. ONTARIO, CA			
FRONTIER AREA: WEST		STATE: CA	DIVISION: GREENFIELD
DRAWN DATE: 9/1/2022	PROJECT NUMBER:	5314205	C.O. AREA: ONTRCAXF EXCH. CODE: 70103
TWP:	RNG:	SEC:	TAX DIST:
DRWG BY: MAS	ENGR : PHONE: 909-785-3324	CARL SPECHT	SCALE: NTS
			PRINT 2 OF 3

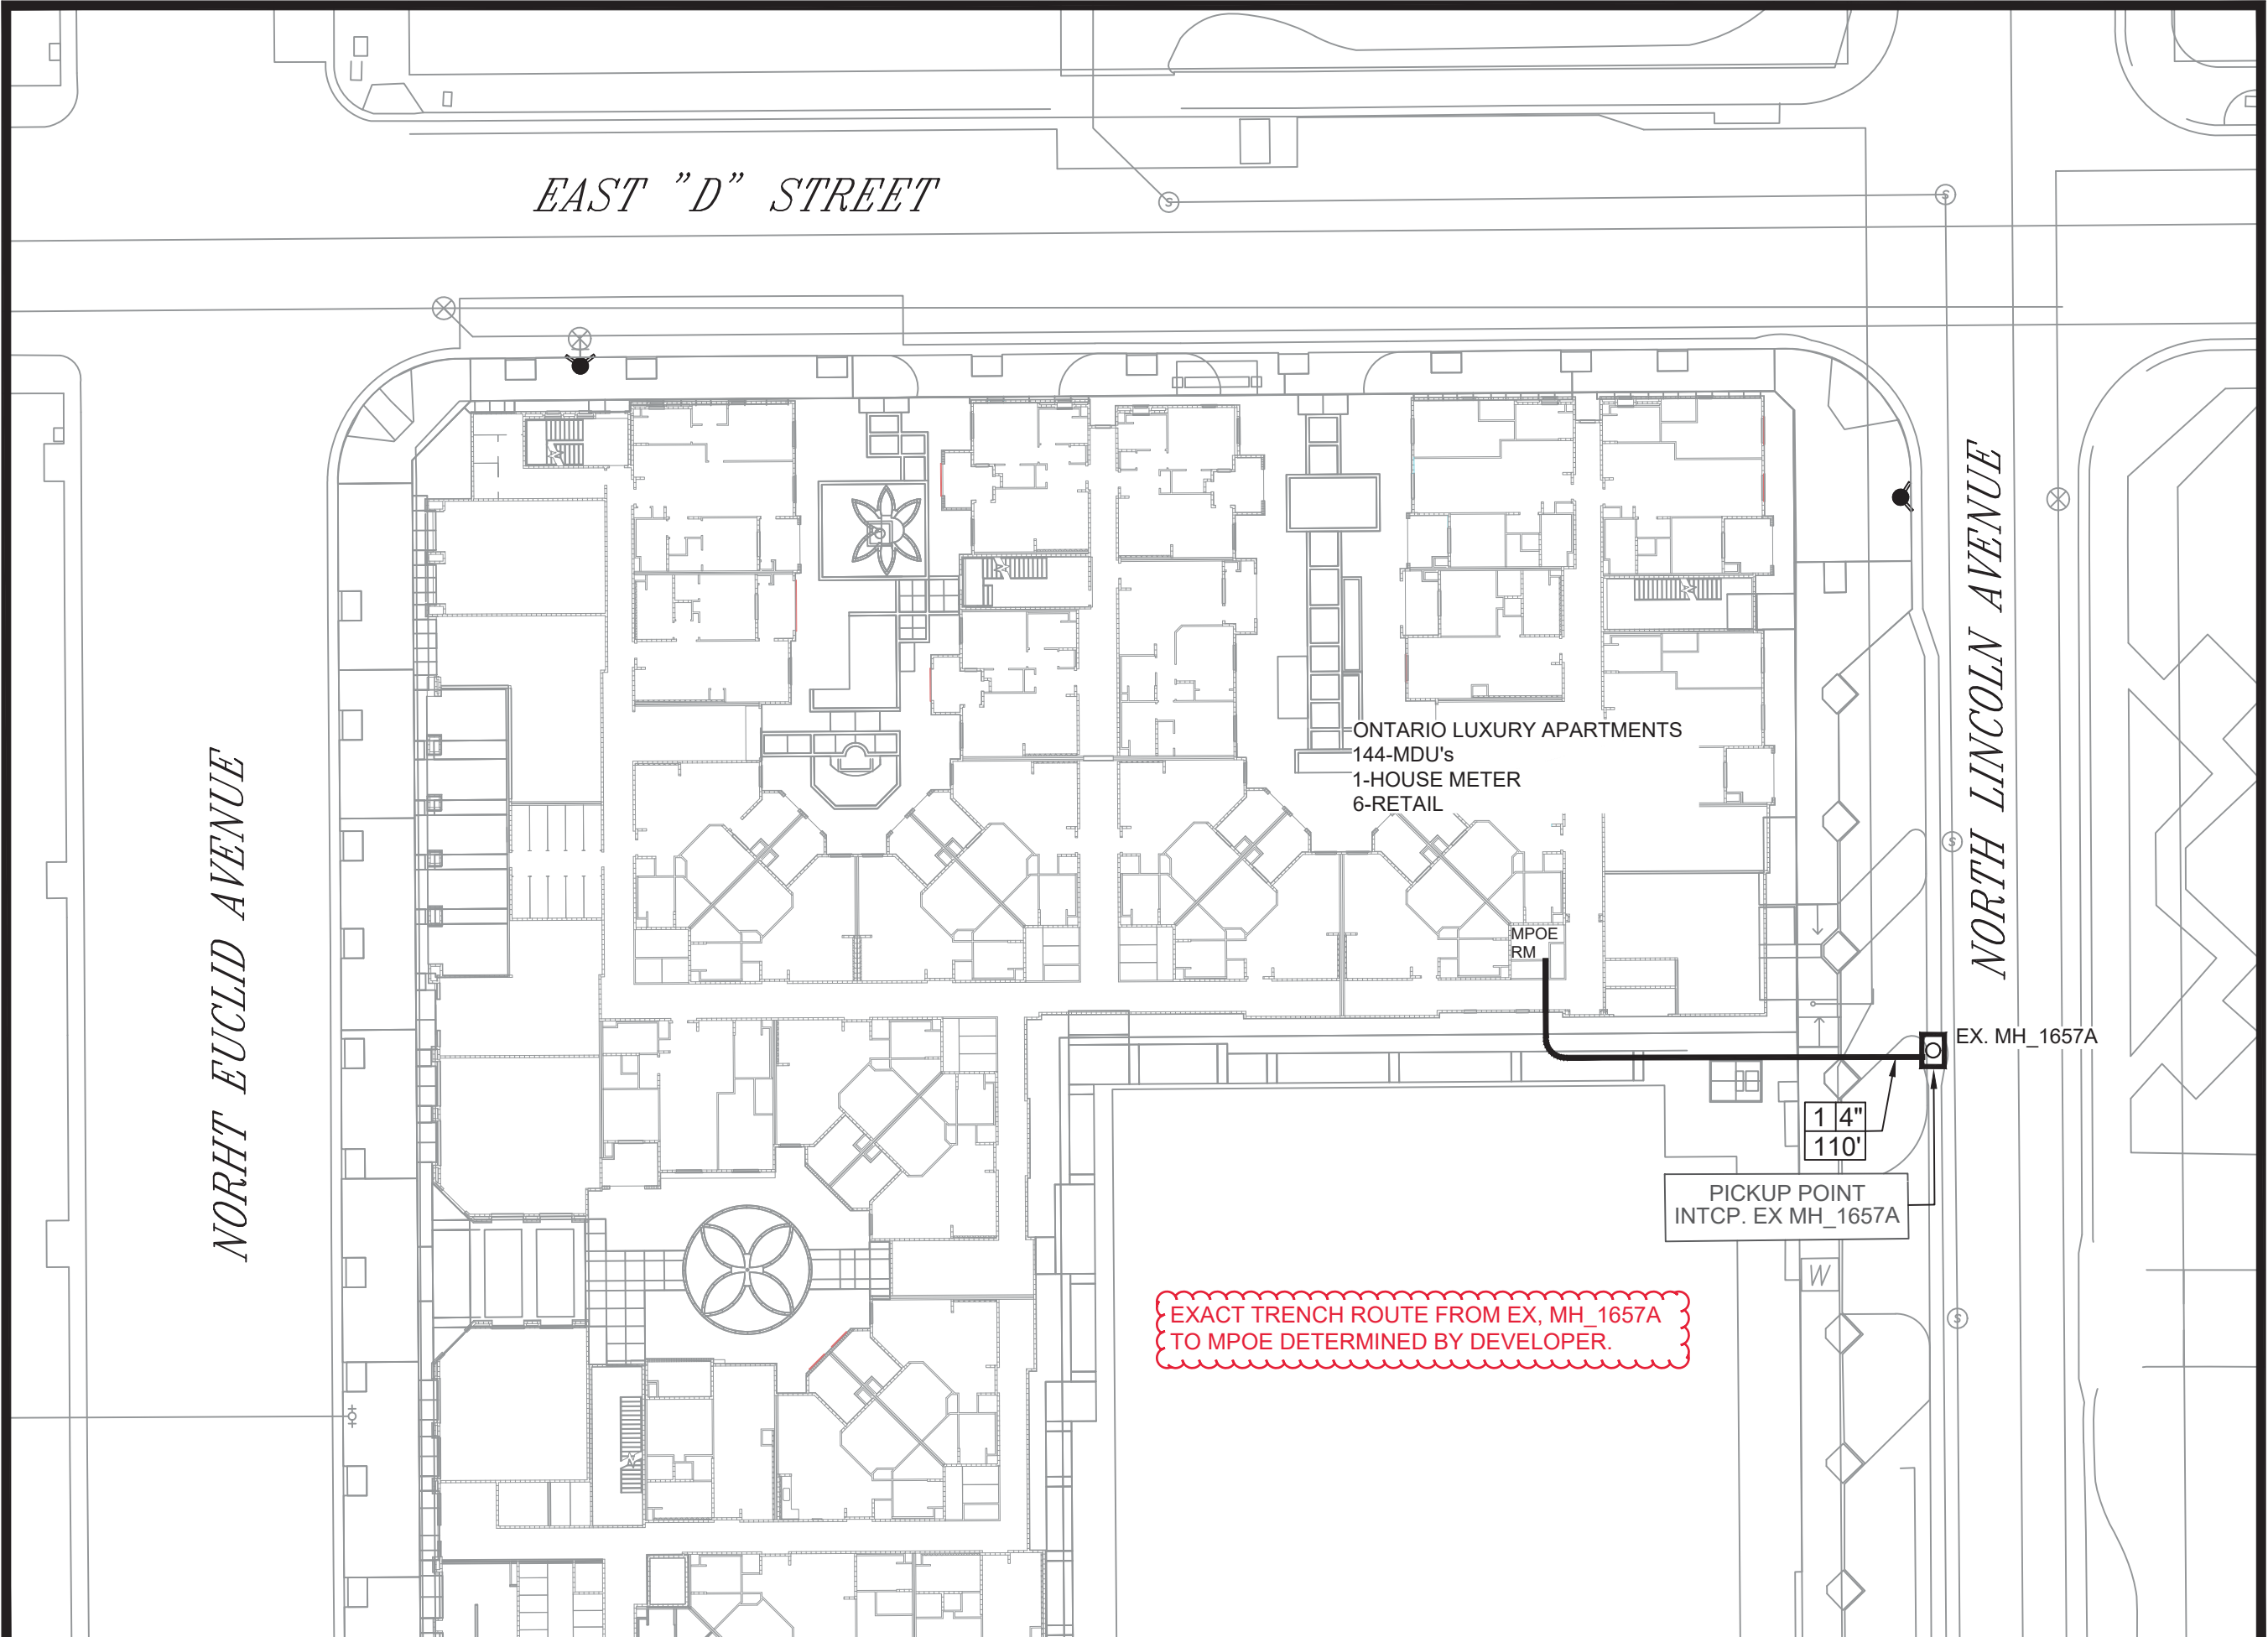

MAP IDENTIFIER

GENERAL CONSTRUCTION NOTES

- 1. A MINIMUM OF 30" BELOW GUTTER GRADE MUST BE MAINTAINED.
- 2. WHEN TELEPHONE IS INSTALLED IN THE SAME TRENCH AS ELECTRICAL POWER A MINIMUM OF 12 INCHES OF WELL PACKED EARTH OR 3 INCHES OF CONCRETE MUST BE MAINTAINED.
- 3. TELEPHONE SHALL BE KEPT CLEAR OF ALL OTHER UTILITIES (GAS, SEWER OR WATER) AS REQUIRED BY GOVERNMENT AGENCIES.
- 4. DEVELOPER/CONTRACTOR IS RESPONSIBLE FOR OBTAINING NECESSARY EXCAVATION PERMITS AND FOR ANY INSPECTION FEES.
- 5. DUCTS MUST BE SHADED WITH SAND AND BACKFILLED WITH MATERIAL CONTAINING NO ROCKS OVER... IN DIAMETER.
- 6. MEASUREMENTS TO BE VERIFIED BY A FRONTIER INSPECTOR.
- 7. UTILITY BOX(ES) 2'X3' STRONGWELL AND CHANNEL HANDHOLES/UTILITY BOXES TO BE PROVIDED AND PLACED BY FRONTIER. COVERS MARKED "FRONTIER" OR "TEL." PROVIDE 8 FT GROUND ROD DRIVEN 7 FT INTO GROUND ON 6 INCH BED OF GRAVEL.

KEY MAP

THIS SHEET

1
COVER

2
NOTES


3

LEGEND

	HUB LOCATION
	EXISTING PED LOCATION
	EXISTING HANDHOLE
	NEW HANDHOLE
	EXISTING MANHOLE
	VERIZON UTILITY POLE
	JOINT UTILITY POLE
	NEW SUBDUCT
	NEW SERVICE LATERAL

1-800-227-2600
AT LEAST 100 YDS BEFORE YOU GO
UNDERGROUND SERVICE ALERT OF BURIED UTILITIES
TICKET #

REV. #:	REV. DATE:	REASON FOR CHANGE:	ENGR:	QCD:	CADD:
TRACT 18029-3 - SUBSTRUCTURE DRAWING N EUCLID AVE & LEMON/D ST/C ST. ONTARIO, CA					
FRONTIER AREA:	STATE:	C.A.	DIVISION:	GREENFIELD	
WEST					
DRAWN DATE:	PROJECT	5314205	C.O. AREA:	ONTRCAXF	
9/1/2022	NUMBER:		EXCH. CODE:	70103	
TWP:	RNG:	SEC:	TAX DIST:		
DRWG BY:	ENGR :	CARL SPECHT	SCALE:	PRINT	
MAS	PHONE:	909-785-3324	NTS	3 OF 3	

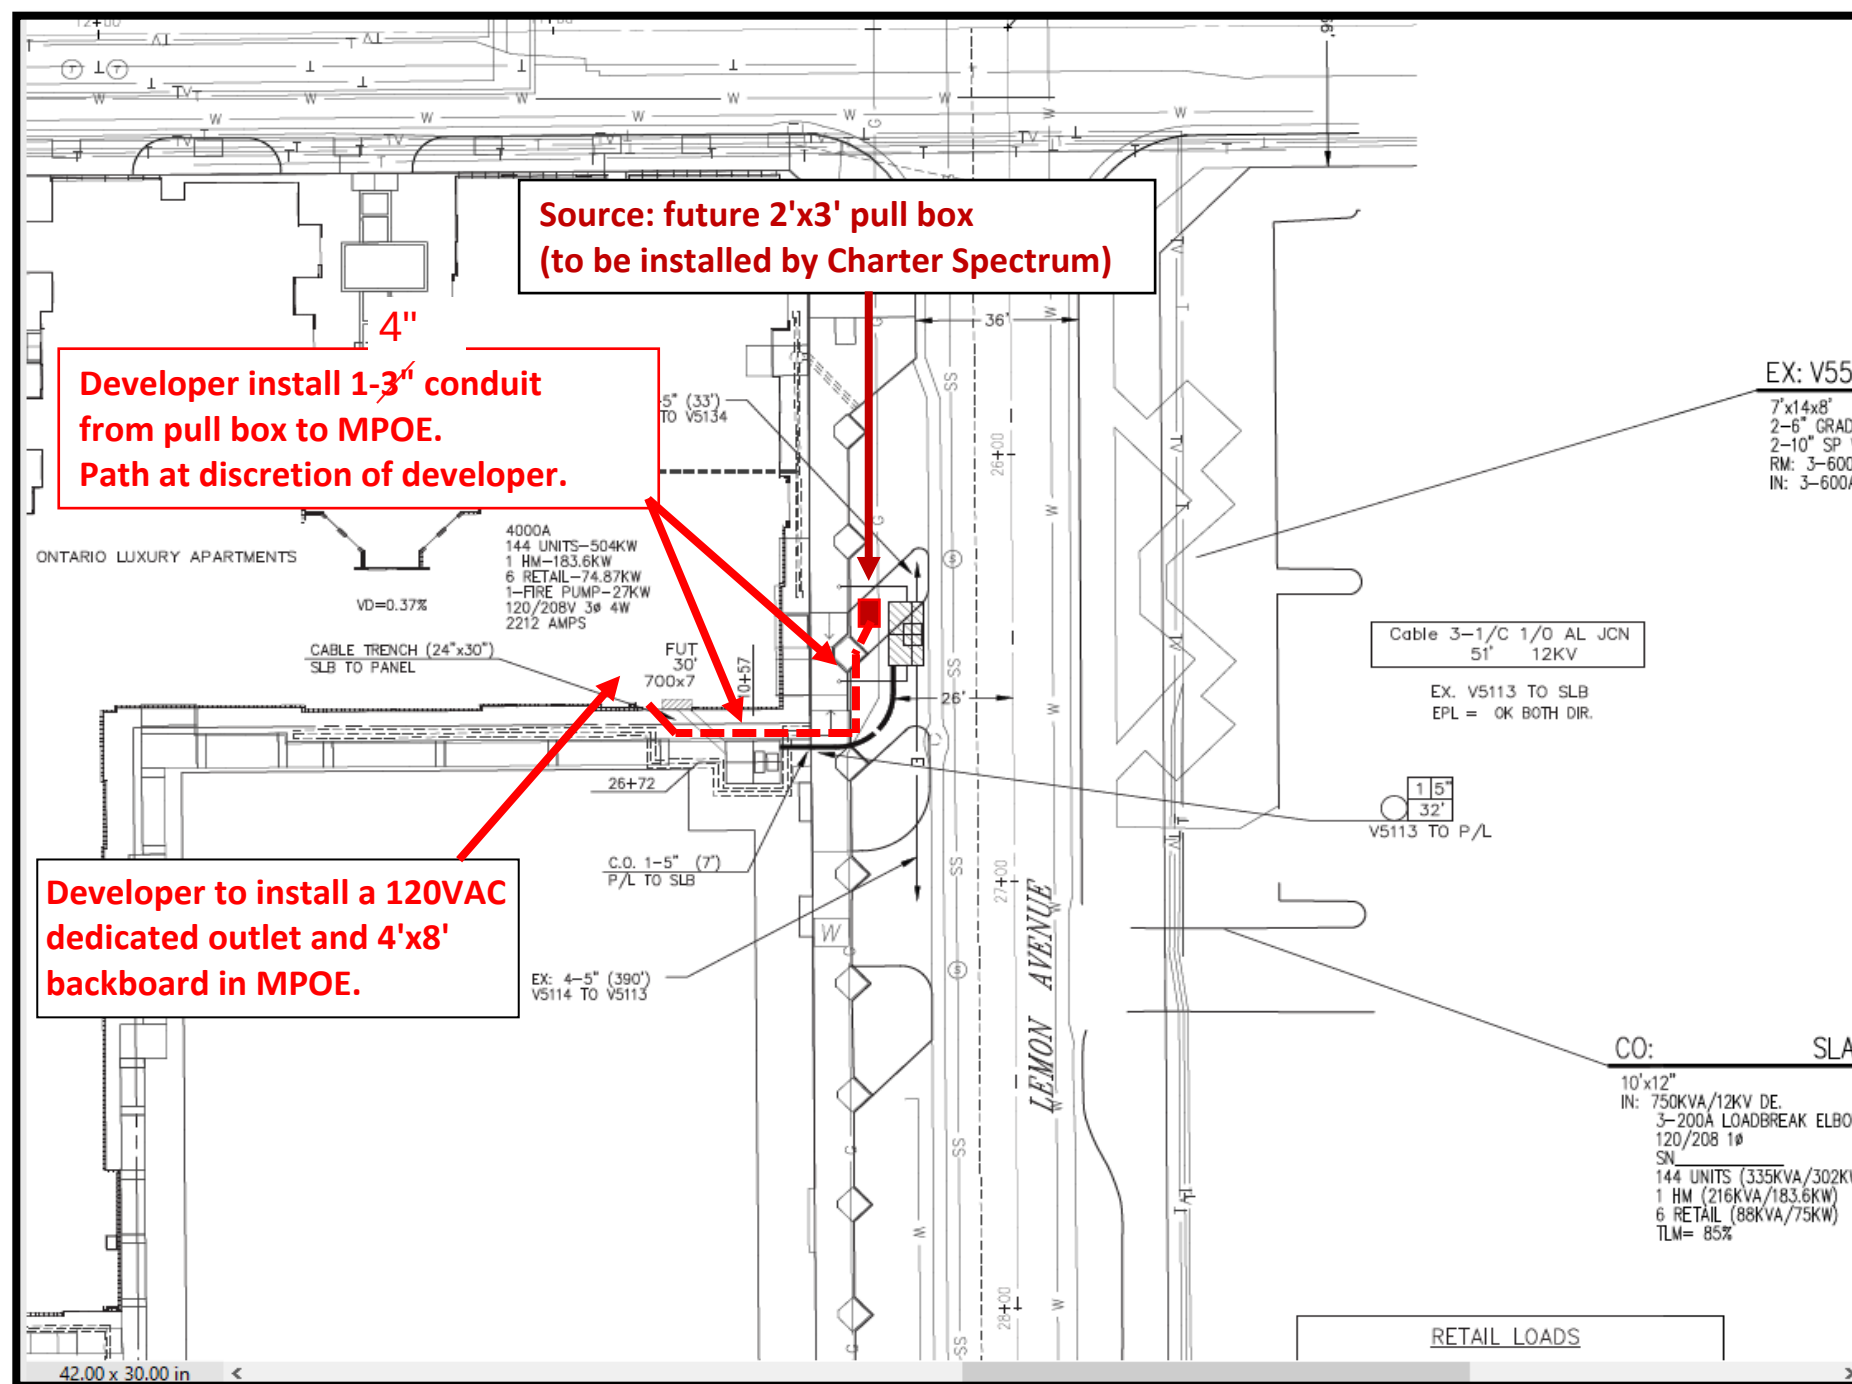

**CHARTER SPECTRUM CONDUIT REDLINE
PROJECT # 3626589**

9/29/22

Downtown Ontario Luxury Apartments
320 N. Euclid Ave., Ontario

Rod Mesa
Spectrum Construction Coordinator
Rod.mesa@charter.com
951-377-4957

0110: Rev. 10/26/20

D124: Rev. 10/12/21

DESCRIPTION	APPROVED	DRAWN
-------------	----------	-------

DB4: Rev. 10/26/20

DISTRICT 34 - ONTARIO		PROJ. MGR. BURGESS, CAROLINA PHONE 951-579-8701		PLANNER MUNOZ, VIVIAN MARIE PHONE 909-274-3028		DESIGNER TURNER-BOYETTE, GEOFF	
PROJECT NO.	SERVICE REQUEST	MSR NO.	PRODUCT-1			ASSOC DESIGN	

TYPE	DATE	APPROVED BY	CHECKED BY	DRAWN BY	PAX #	SHEET 1 OF 2	DESIGN\DRWG NO. 1473134_0.01
Southern California Edison Company							


D05: Rev. 07/21/16

D41: Rev. 01/21/09


070: 10/26/20

D41: Rev. 01/21/09


D41: Rev. 01/21/09

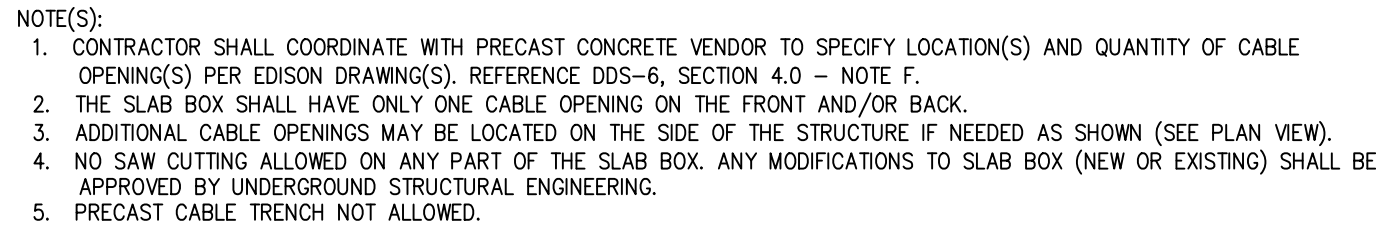

FILE NAME: 1473134_0.01.DWG SAVE DATE: 9/8/2022 8:15 AM SAVED BY: TURNERG1

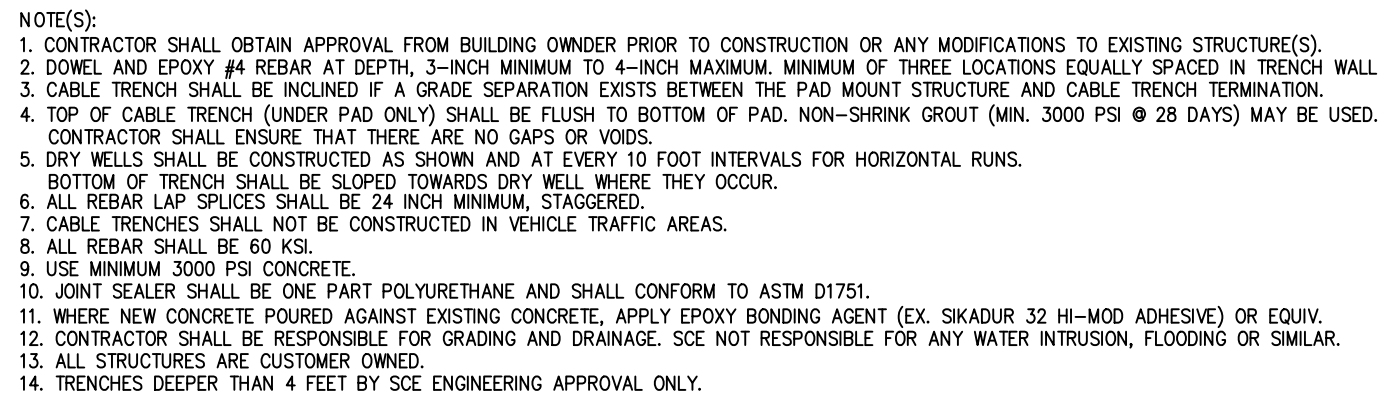

D90C: REV. 06/08/20

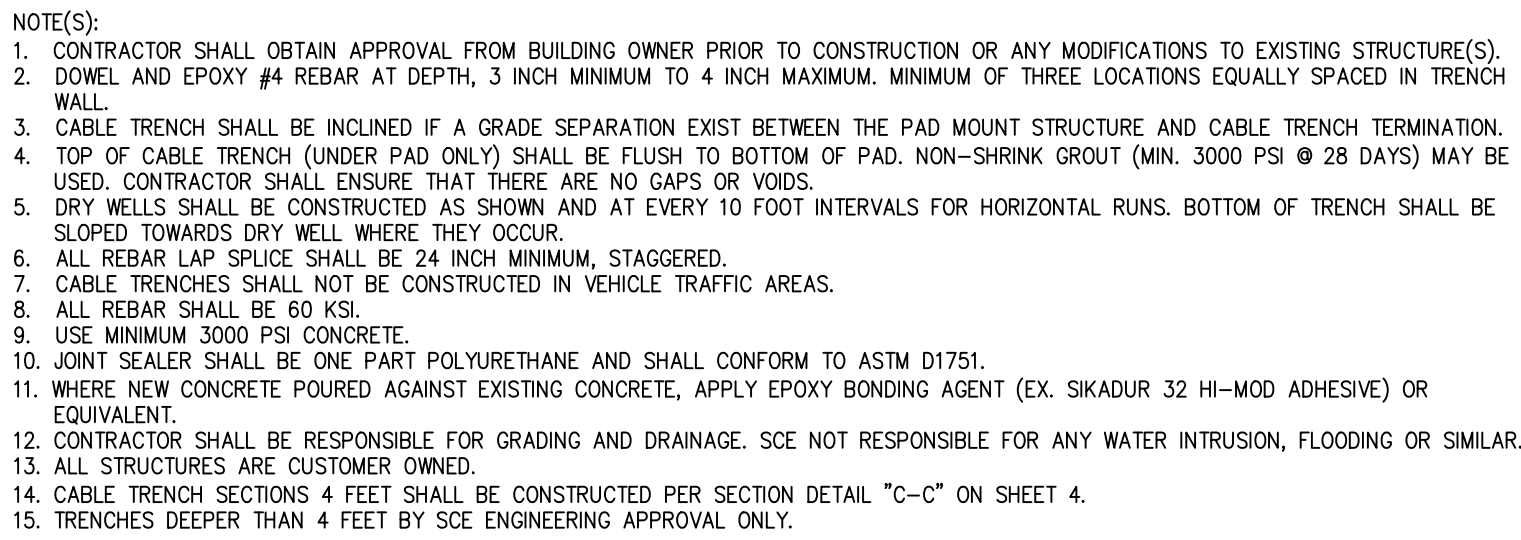

D90C: REV. 06/08/20



INSTALL METHOD:


☒ EDISON

☐ APPLICANT

DISTRICT 34 - ONTARIO		PROJ. NAME: BURGESS, CAROLINA 951-579-8700		PLANNER: MONROE, VIVIAN MARIE PHONE: 909-274-3028		DESIGNER TURNER-BOYETTE, GEOFF	
PROJECT NO. SERVICE REQUEST 2335830 3227428		MSR NO.		PRODUCT: 1940226-LINE EXTENSION		ASSOC. DESIGN 1743134	
CROSS / VOLTAGE HAWKINS / 12KV		GPS		PRODUCT-2		ASSOC. DESIGNED	
SUB / PG NO. UPLAND / 12KV		CIRCUIT CODE		PRODUCT-3		ASSOC. DESIGNED	
INVENTORY MAP MT-4069-C		I.P.A. NO.		PROPOSED CONSTRUCTION (LOCATION) EUCUID INVESTMENT GROUP, LLC 346 N EUCUID AVE (DOWNTOWN APTS) ONTARIO CA 91761			
F 08/31/22 V. MUNOZ		J. NOOHE		G. TURNER-BOYETTE			
A 07/14/22		S. MALLORDE		E. SOSA			
TYPE	DATE	APPROVED BY	CHECKED BY	DRAWN BY	PAX #	SHEET	DESIGN/DWG NO.
Southern California Edison Company						1A OF 2	1743134_0.01

FINAL DESIGN
APPROVED FOR CONSTRUCTION

[illegible]

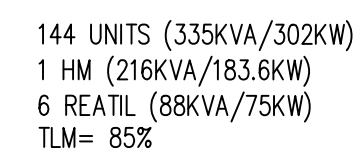

FILE NAME: 1473134_0.01.DWG SAVE DATE: 9/8/2022 8:15 AM SAVED BY: TURNERGI

GENERAL NOTES

- ALL WORK SHALL BE DONE IN STRICT CONFORMANCE WITH THE CURRENT CITY OF ONTARIO STANDARD SPECIFICATIONS AND STANDARD DRAWINGS AND CURRENT STANDARD SPECIFICATIONS AND STANDARD PLANS FOR PUBLIC WORKS CONSTRUCTION UNLESS OTHERWISE APPROVED BY THE CITY ENGINEER.
- ANY CONTRACTOR PERFORMING WORK ON THIS PROJECT SHALL FAMILIARIZE HIMSELF/HERSELF WITH THE SITE AND SHALL BE SOLELY RESPONSIBLE FOR ANY DAMAGE TO EXISTING FACILITIES RESULTING DIRECTLY OR INDIRECTLY FROM HIS/HER OPERATIONS, WHETHER OR NOT THE FACILITY IS SHOWN ON THESE PLANS
- ALL OBSTRUCTIONS WITHIN THE AREA TO BE IMPROVED SHALL BE REMOVED AND/OR RELOCATED AT THE DIRECTION OF THE CITY ENGINEER. UTILITIES ARE TO BE RELOCATED BY THEIR RESPECTIVE OWNERS UNLESS NOTED OTHERWISE. THE CONTRACTOR IS REFERRED TO SECTION 5 OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION
- UTILITY LINE LOCATIONS WERE TAKEN FROM AVAILABLE RECORD DATA AND WERE NOT LOCATED IN THE FIELD, UNLESS OTHERWISE NOTED ON THE PLAN. THE CONTRACTOR IS REFERRED TO SECTION 5 OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION.
- IN CASE OF ANY ACCIDENTS INVOLVING SAFETY MATTERS COVERED BY SECTION 6409(B) OF THE CALIFORNIA LABOR CODE, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE STATE DIVISION OF INDUSTRIAL SAFETY.
- STATE LAW (SB 3019) REQUIRES THE CONTRACTOR TO CONTACT UNDERGROUND SERVICE ALERT AND OBTAIN AN IDENTIFICATION NUMBER PRIOR TO THE ISSUANCE OF CITY'S ENCROACHMENT PERMIT. THE CONTRACTOR SHALL NOTIFY UNDERGROUND SERVICE ALERT AT 1-800-422-4133 A MINIMUM OF 48 HOURS IN ADVANCE OF ANY CONSTRUCTION ACTIVITIES.
- PRIOR TO THE START OF ANY WORK THE CONTRACTOR SHALL OBTAIN A BUSINESS LICENSE FROM THE CITY OF ONTARIO. THE CONTRACTOR SHALL ALSO OBTAIN AN ENCROACHMENT PERMIT FROM THE ENGINEERING DEPARTMENT NO LESS THAN 48 HOURS PRIOR TO START OF ANY CONSTRUCTION WITHIN THE PUBLIC RIGHT-OF-WAY.
- THE CONTRACTOR SHALL OBTAIN A TRAFFIC CONTROL PERMIT 48 HOURS PRIOR TO TIME OF CONSTRUCTION WITHIN THE PUBLIC RIGHT-OF-WAY. THE CONTRACTOR IS REFERRED TO SECTION 7-10.3 OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION.
- THE CONTRACTOR SHALL RENEW OR REPLACE ANY EXISTING TRAFFIC STRIPING AND/OR PAVEMENT MARKINGS, WHICH DURING HIS OPERATIONS HAVE BEEN EITHER REMOVED OR THE EFFECTIVENESS OF WHICH HAS BEEN REDUCED. RENEWAL OF TRAFFIC STRIPING AND MARKINGS SHALL BE DONE USING REFLECTIVE THERMO-PLASTIC MARKINGS IN CONFORMANCE WITH SECTION 84 & 85 OF THE CALTRANS STANDARD SPECIFICATIONS AND AS DIRECTED BY THE ENGINEER. ALL REGULATORY, WARNING, AND GUIDE SIGNS SHALL HAVE 3M DIAMOND, VIP GRADE SHEETING WITH SERIES 1160 PROTECTIVE OVERLAY FILM.
- THE LAND SURVEYORS ACT, SECTION 8771 OF THE BUSINESS & PROFESSIONAL CODE, AND SECTIONS 732.5, 1492-5, 1810-5 OF THE STREETS AND HIGHWAY CODE REQUIRE THAT SURVEY MONUMENTS SHALL BE PROTECTED AND PERPETUATED. "IT SHALL BE THE RESPONSIBILITY OF THE DEVELOPER OR OTHERS PERFORMING THE CONSTRUCTION WORK TO RETAIN A QUALIFIED REGISTERED CIVIL ENGINEER AND/OR LICENSED LAND SURVEYOR PRIOR TO THE START OF CONSTRUCTION TO LOCATE, REFERENCE AND FILE THE NECESSARY CORNER RECORDS WITH THE COUNTY SURVEYOR'S OFFICE FOR SURVEY CONTROL POINTS/ MONUMENTS THAT EXIST AS SHOWN ON RECORDED TRACT MAPS, PARCEL MAPS, RECORDS OF SURVEYS AND HIGHWAY MAPS, AND MAY BE DISTURBED OR DAMAGED BY THE PROPOSED CONSTRUCTION." AFTER THE COMPLETION OF THE PROPOSED CONSTRUCTION, SAID MONUMENTS AND/OR CONTROL SURVEY POINTS SHALL BE RESET TO THE NEW SURFACE IN ACCORDANCE WITH CURRENT PROFESSIONAL LAND SURVEYING PRACTICES. CORNER RECORDS SHALL BE FILED WITH THE COUNTY SURVEYOR FOR ALL THE NEW MONUMENTS SET.
- THE DEVELOPER SHALL PROVIDE THE CITY WITH A COMPLETED SET OF "AS BUILT", MYLAR DRAWINGS PRIOR TO THE FINAL INSPECTION.
- A CITY ACCEPTED/APPROVED SET OF PLANS SHALL BE KEPT ON THE JOB SITE AT ALL TIMES.
- A PRE-CONSTRUCTION MEETING SHALL OCCUR PRIOR TO CONSTRUCTION. ATTENDEES SHALL INCLUDE A CITY REPRESENTATIVE AND THE CONTRACTOR WHO WILL PERFORM THE WORK. "CUT-SHEETS" SHALL BE PROVIDED TO THE CITY AT THIS MEETING FOR ITS REVIEW.
- CITY ACCEPTANCE OF PLANS DOES NOT RELIEVE THE DEVELOPER FROM RESPONSIBILITY FOR THE CORRECTION OF ERROR AND OMISSION DISCOVERED DURING CONSTRUCTION. UPON REQUEST OF THE CITY INSPECTOR, THE REQUIRED PLAN REVISIONS SHALL BE PROMPTLY SUBMITTED TO THE CITY ENGINEER FOR REVIEW.
- ANY REQUIRED RIGHT-OF-WAY OR EASEMENT SHALL BE DEDICATED TO AND ACCEPTED BY THE CITY PRIOR TO COMMENCEMENT OF CONSTRUCTION OF THE IMPROVEMENTS WITHIN THE REQUIRED RIGHT-OF-WAY OR EASEMENT.



ENGINEER'S NOTICE TO CONTRACTORS

THE EXISTENCE AND LOCATION OF ANY UNDERGROUND UTILITY PIPES OF STRUCTURES SHOWN ON THESE PLANS WERE OBTAINED BY A SEARCH OF AVAILABLE RECORDS. LOCATIONS ARE APPROXIMATE AND SHALL BE CONFIRMED IN THE FIELD BY THE CONTRACTOR, SO THAT ANY NECESSARY ADJUSTMENT CAN BE MADE IN ALIGNMENT AND/OR GRADE OF THE PROPOSED IMPROVEMENT. THE CONTRACTOR IS REQUIRED TO TAKE DUE PRECAUTIONARY MEASURE TO PROTECT ANY UTILITY LINES SHOWN AND ANY OTHER LINES NOT OF RECORD OR NOT SHOWN ON THESE PLANS.

REVISIONS			
MARK	DATE	BY	APPROVED/RCE NO.

DESIGNED BY	USSJ
DATE	04/28/2022
DRAWN BY	ECL
DATE	09/16/2022
REVIEWED BY	
DATE	

CITY OF ONTARIO	
RECOMMENDED BY:	BRYAN LIRLEY, P.E., ASSISTANT CITY ENGINEER
DATE	
ACCEPTED BY:	KHOI DO, P.E., CITY ENGINEER
DATE	

RECOMMENDED FOR ACCEPTANCE:	
TECK LOH, PE	
HARRIS & ASSOCIATES	
DATE	

OWNER/DEVELOPER

HUTTON COMPANIES
2100 SOUTH GATE COLLEGE BLVD.
ANAHEIM, CA 92806
(714) 921-1200



UTILITIES:

CITY OF ONTARIO (909)395-2025
INLAND EMPIRE (951)395-2678
UTILITIES AGENCY
TELEPHONE: VERIZON (951)469-6369
GAS: SOUTHERN CALIFORNIA GAS CO. (951)335-3928
ELECTRIC: SOUTHERN CALIFORNIA EDISON CO. (951)930-8591
FIRE PROTECTION: CITY OF ONTARIO FIRE DEPARTMENT (909)395-2029



NOTE: ALL CITY FIBER SHOULD BE INSTALLED WITH CITY STREET LIGHT IN JOINT TRENCH OR IN A SEPARATE TRENCH. CITY FIBER SHOULD NOT BE INSTALLED IN JOINT TRENCH WITH PRIVATE DRY UTILITIES EXCEPT AT SERVICE CROSSINGS.

INDEX MAP

NTS

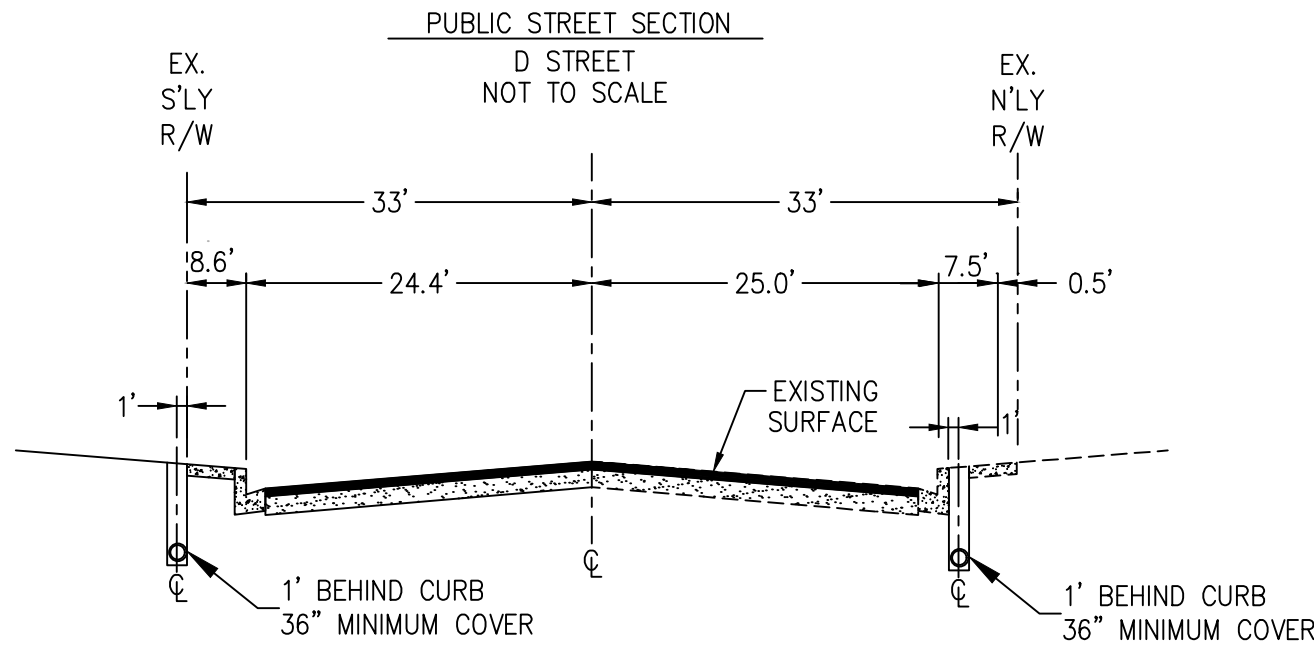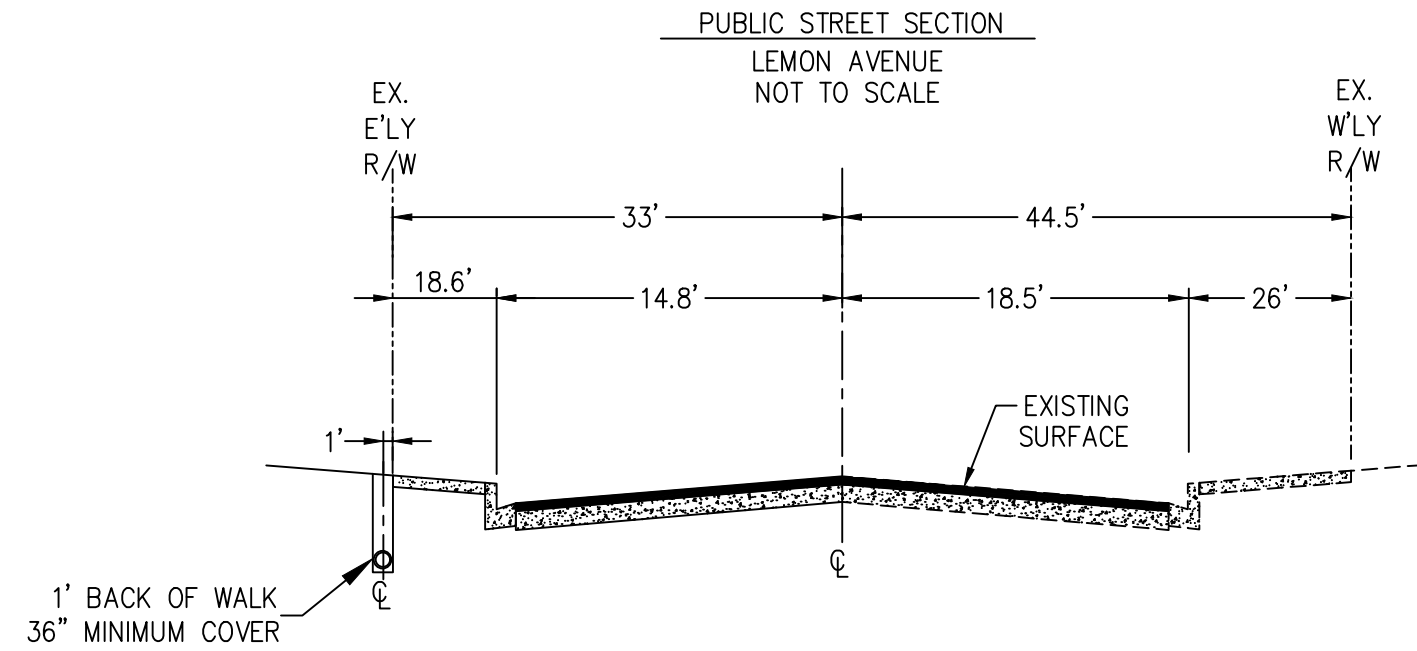

FIBER OPTIC IMPROVEMENT PLAN
FOR
PDEV20-020
CITY OF ONTARIO

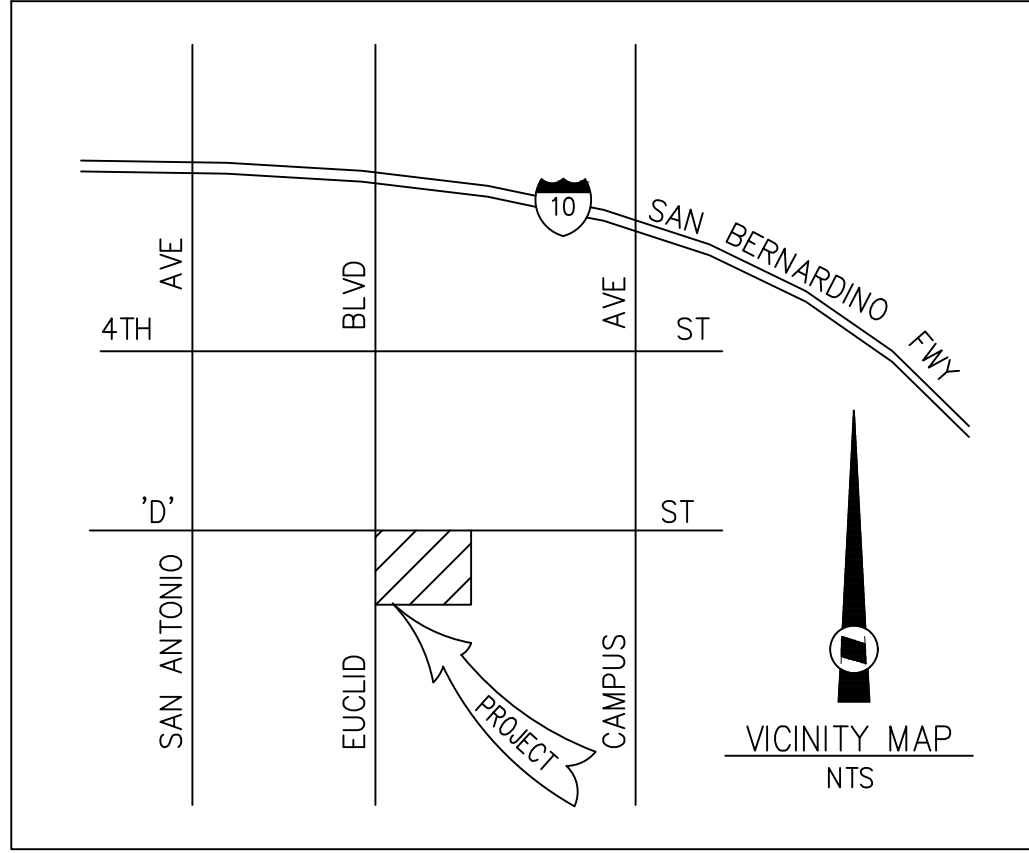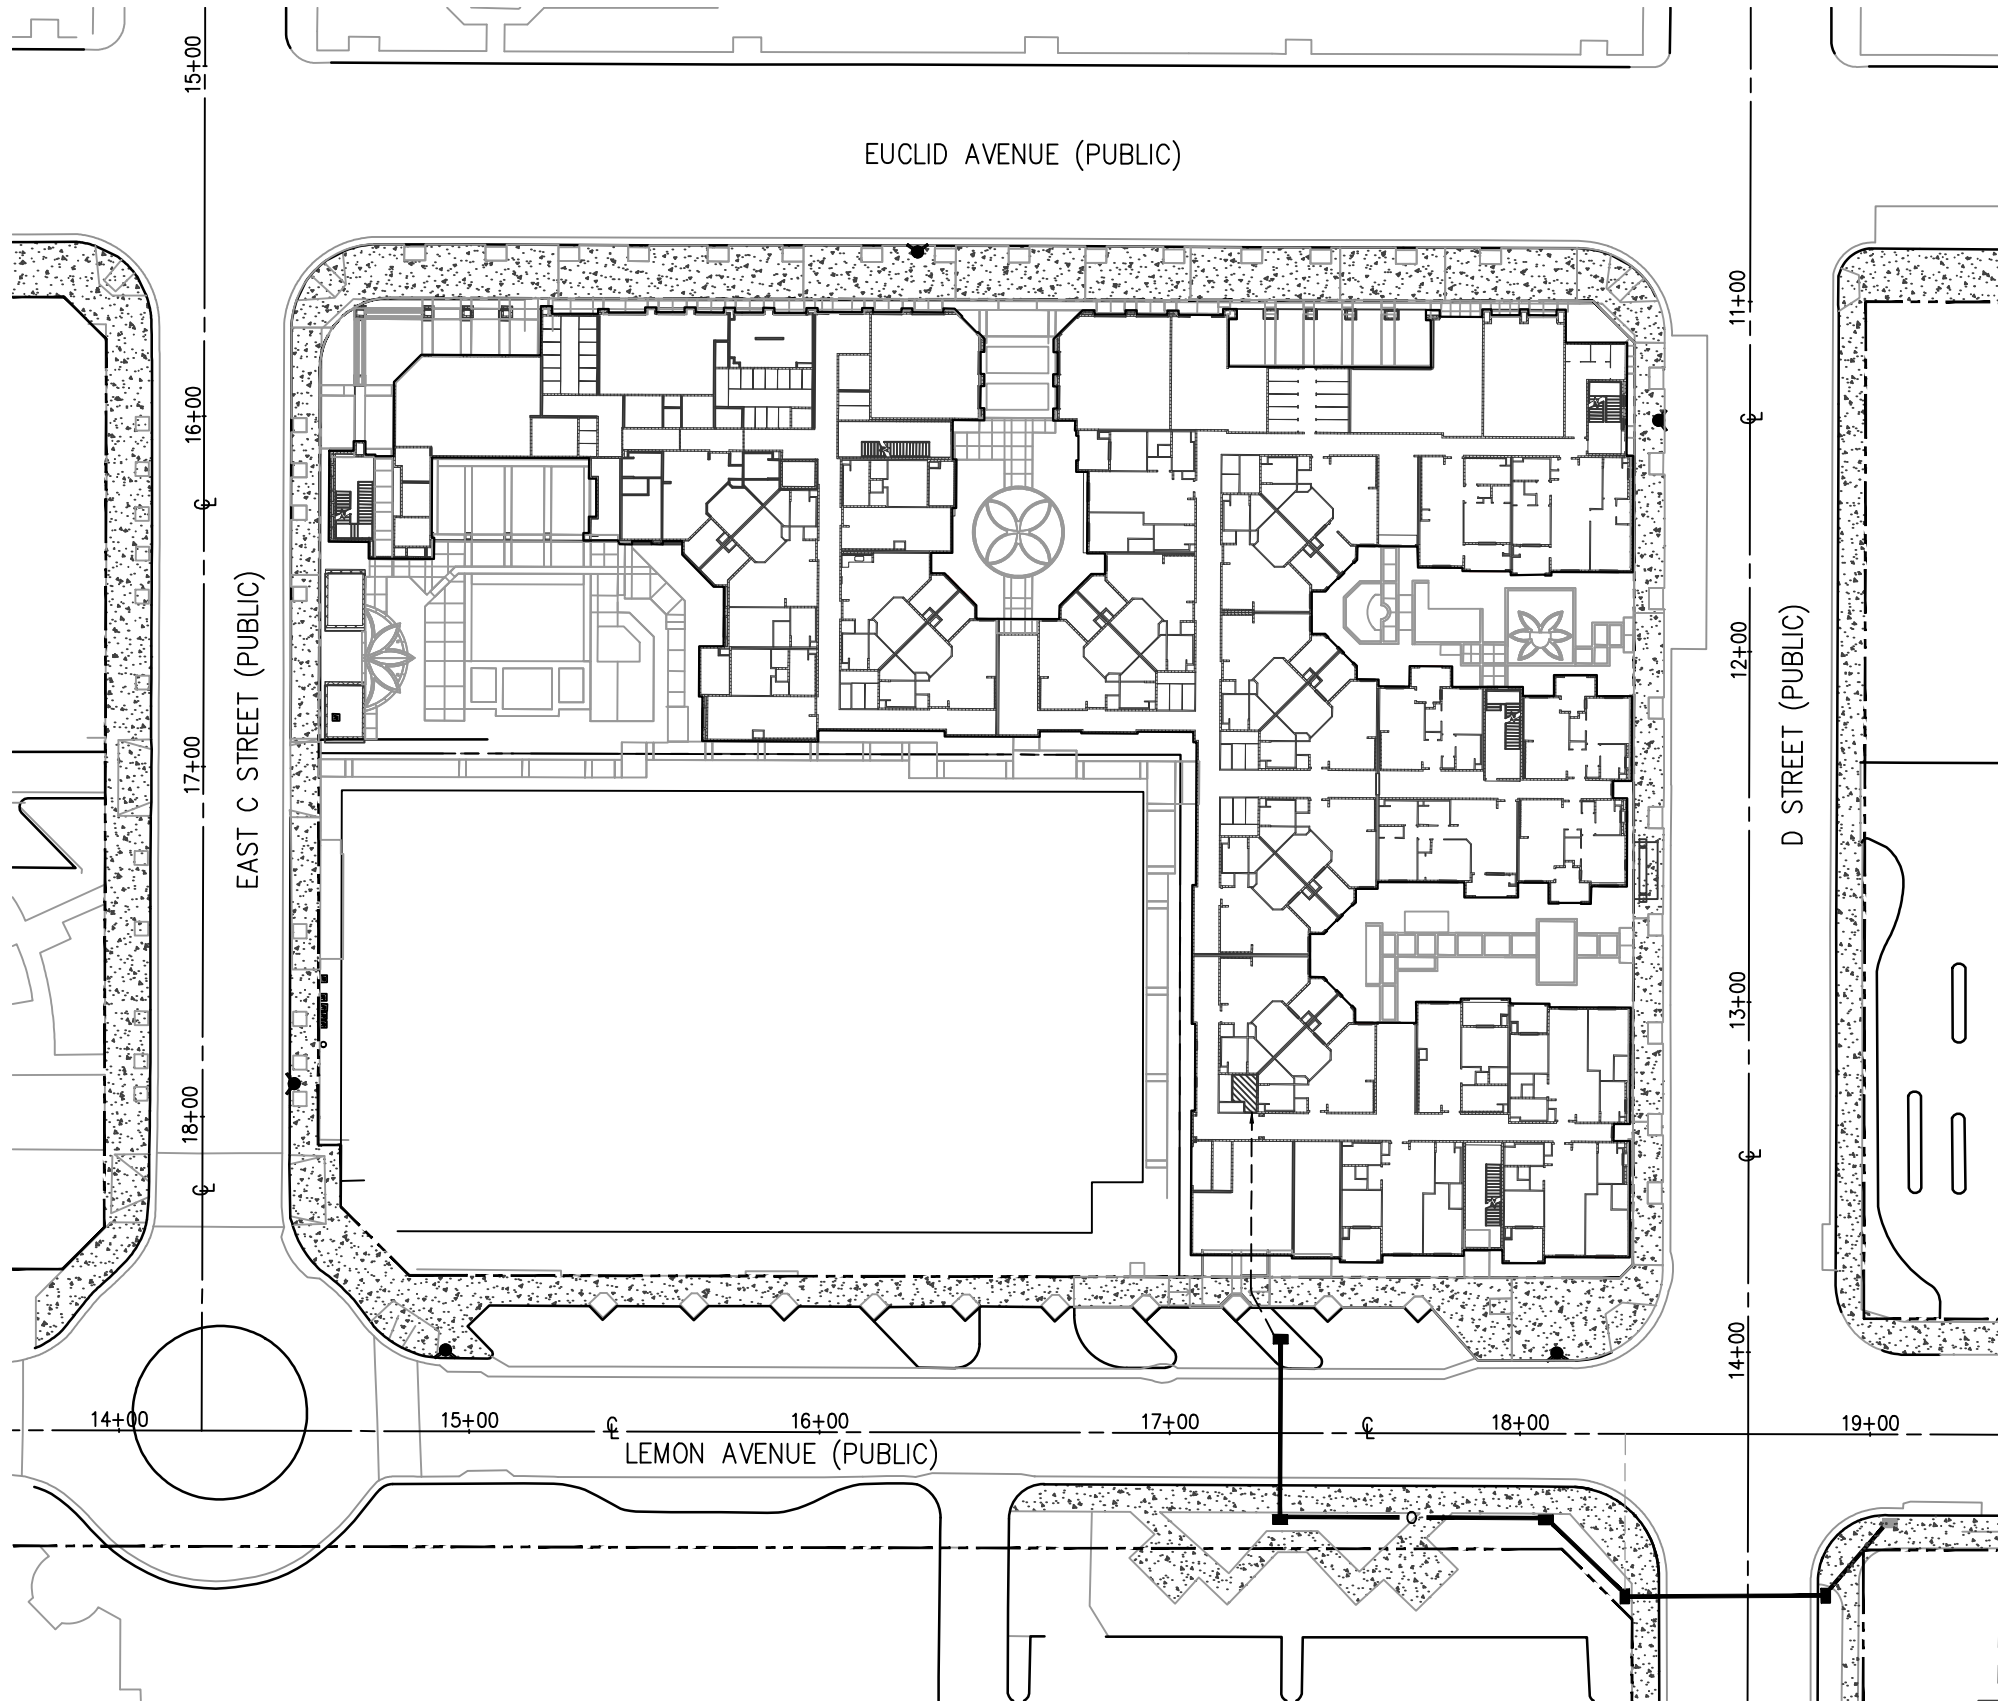

LEGEND OF ABBREVIATIONS & SYMBOLS

AC	ASPHALT CONCRETE	---	GRADE BREAK
BLDG	BUILDING	---	FLOW LINE
C&G	CURB & GUTTER	---	PROPOSED CONCRETE SURFACE
C/L	CENTERLINE	---	PROPOSED BIOINFILTRATION BMP
CF	CURB FACE	---	EXISTING TREE
ELEC.	ELECTRIC	---	SEWER CLEANOUT
EXIST.	EXISTING	---	DOUBLE DETECTOR CHECK ASSEMBLY
FF	FINISHED FLOOR	---	BACKFLOW PREVENTION DEVICE
FG	FINISHED GRADE	---	FIRE DEPARTMENT CONNECTION
FL	FLOW LINE	---	POST INDICATOR VALVE
FS	FINISH SURFACE	---	END CAP
MP	MINIMUM POINT OF ENTRY	---	WATER METER
IMP.	IMPROVEMENTS	---	THRUST BLOCK
R/W	RIGHT OF WAY	---	FIRE HYDRANT
TELE.	TELEPHONE	---	
POC	POINT OF CONNECTION	---	
PCC	PORTLAND CEMENT CONCRETE	---	
PROP.	PROPOSED	---	
TELE.	TELEPHONE	---	
TC	TOP OF CURB	---	
XXX.XX	PROPOSED ELEVATION	---	
(XXX.XX)	EXISTING ELEVATION	---	
---	EXISTING FENCE	---	
---	PROPERTY LINE	---	
[0.50%]	PIPE SLOPE	---	

- NOTES:
- Footage quantities are approximate.
 - Where reference is to an item not detailed, see separate description list.
 - This list provides a summary of major items.

LIST OF MATERIALS

NOTE NO.	QTY.	DESCRIPTION	SIZE	ITEM NO.
1	N/A	FIBER OPTIC CONDUIT	13/16 MM	(2) 7-WAY MICRODUCT (DURALINE-ORANGE) 13/16 MM
2	N/A	HH-2/15 LESS THAN OR EQUAL TO 288 STRANDS	17"x30"x24"	FCA-173024T-90077 NEWBASIS
3	44'	FIBER OPTIC CONDUIT	2"	1-2" HDPE SDR-11 (SMOOTHWALL) ROLL PIPE (ORANGE)
4	N/A	FIBER OPTIC CONDUIT	3/4"	1-3/4" HDPE SDR-11 (SMOOTHWALL) ROLL PIPE (ORANGE)
5	N/A	HH-FP FLOWER POT		HH-FP (910-10-GRN) CARSON HH-FP LID (910-4B/GRN/ELECTRIC) CARSON HHP-FP BOLT (1/2-13-X-2.5 HEX BOLT W/WASHER SS 80002033) CARSON
6	N/A	HH-2/12 LESS THAN OR EQUAL TO 144 STRANDS	13"x24"x18"	PCA-132418-90087 NEWBASIS
7	N/A	FIBER OPTIC CONDUIT (1) 7-WAY MICRODUCT	2" 16 MM	1-2" HDPE SDR-11 (SMOOTHWALL) ROLL PIPE (ORANGE) ROLL PIPE (ORANGE) DURALINE - 16MM
8	5	HH-3/22 LESS THAN OR EQUAL TO 432 STRANDS	30"x48"x36"	PCA-304836-90244 NEWBASIS
9	N/A	HH-4/22 GREATER THAN 432 STRANDS	36"x60"x36"	PCA-366036-90146 NEWBASIS
10	225'	FIBER OPTIC CONDUIT	2"	1-2" HDPE SDR-11 (SMOOTHWALL) ROLL PIPE (ORANGE) 1-2" HDPE SDR-11 (SMOOTHWALL) ROLL PIPE (ORANGE W/ BLACK)
11	N/A	HH-2/22 LESS THAN EQUAL TO 432 STRANDS	17"x30"x24"	PCA-173024-90116 NEWBASIS
12	N/A	HH-1/15 LESS THAN OR EQUAL TO 432 STRANDS	13"x24"x18"	FCA-132418T-90062 NEWBASIS
13	N/A	HH-2A/15 LESS THAN OR EQUAL TO 432 STRANDS	24"x36"x30"	FCA-243630T-90014 NEWBASIS
14	N/A	HH-2A/22 LESS THAN OR EQUAL TO 432 NEWBASIS	24"x36"x30"	PCA-243630-90064 NEWBASIS
15	225'	FIBER OPTIC TRENCH		TOTAL FIBER OPTIC TRENCH FOOTAGE WITHIN PUBLIC RIGHT OF WAY

REVISIONS				DESIGNED BY	USSJ	CITY OF ONTARIO		RECOMMENDED FOR ACCEPTANCE:	results through teamwork 25909 Pala - Suite 260 - Mission Viejo, CA 29691 Phone: (949) 770-1900 / Fax: (949) 215-0540	REGISTERED PROFESSIONAL ENGINEER KIRK R. MEDEROS No. 86558 Exp. 3/31/23 CIVIL STATE OF CALIFORNIA	FIBER OPTIC IMPROVEMENT PLAN LEMON AVENUE, D STREET		PDEV20-020	SHEET 1 OF 2
MARK	DATE	BY	APPROVED/RCE NO.	DATE	04/28/2022	RECOMMENDED BY:	BRYAN LIRLEY, P.E., ASSISTANT CITY ENGINEER	TECK LOH, PE	DATE	DATE	DATE	DATE	CONTRACT	
													ACCOUNT	
													DWG. NO.	

Underground Service Alert



Call: TOLL FREE
1-800
422-4133



TWO WORKING DAYS BEFORE YOU DIG

REVISIONS				DESIGNED BY	USSI
MARK	DATE	BY	APPROVED/RCE NO.	DATE	10/26/2021
				DRAWN BY	EAS
				DATE	09/16/2022
				REVIEWED BY	
				DATE	

CITY OF ONTARIO

RECOMMENDED BY: BRYAN LIRLEY, P.E., ASSISTANT CITY ENGINEER

DATE

ACCEPTED BY: KHOI DO, P.E., CITY ENGINEER

DATE



results through teamwork

25909 Pala - Suite 260 - Mission Viejo, CA 92691

Phone: (949) 770-1900 / Fax: (949) 215-0540

SIGNATURE

DATE



KIRK R. NEDEROS
No. 88558
Exp. 3/31/23
CIVIL
STATE OF CALIFORNIA

DATE

FIBER OPTIC IMPROVEMENT PLAN

LEMON AVENUE, 'D' STREET



PDEV20-020

SHEET 2 OF 2

CONTRACT

ACCOUNT


DWG. NO.


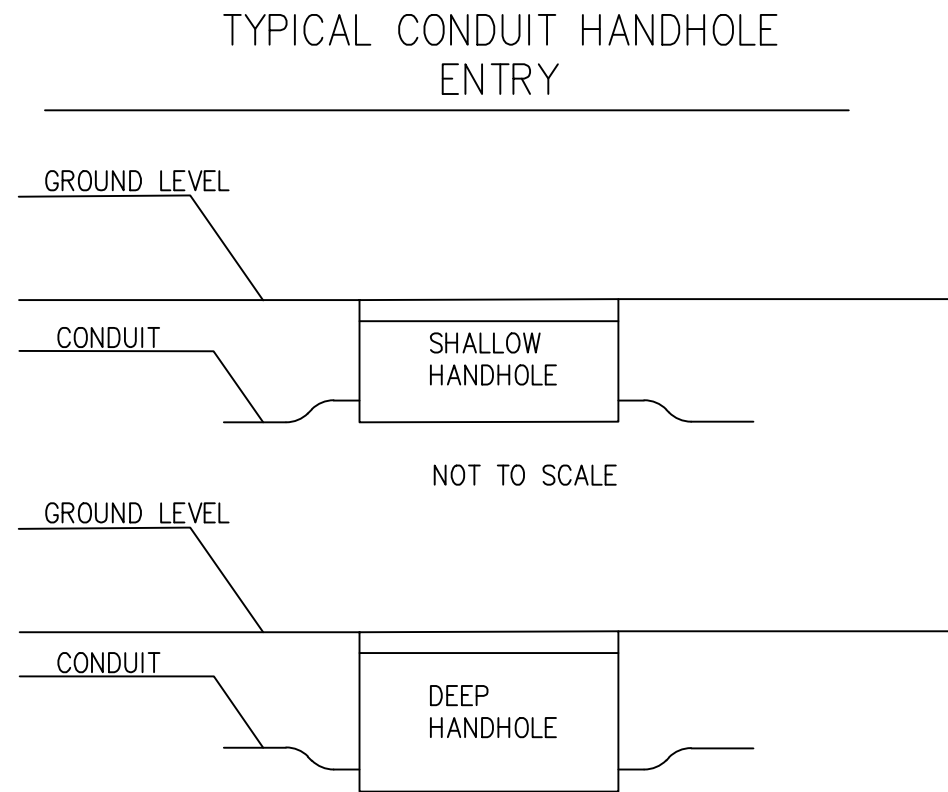
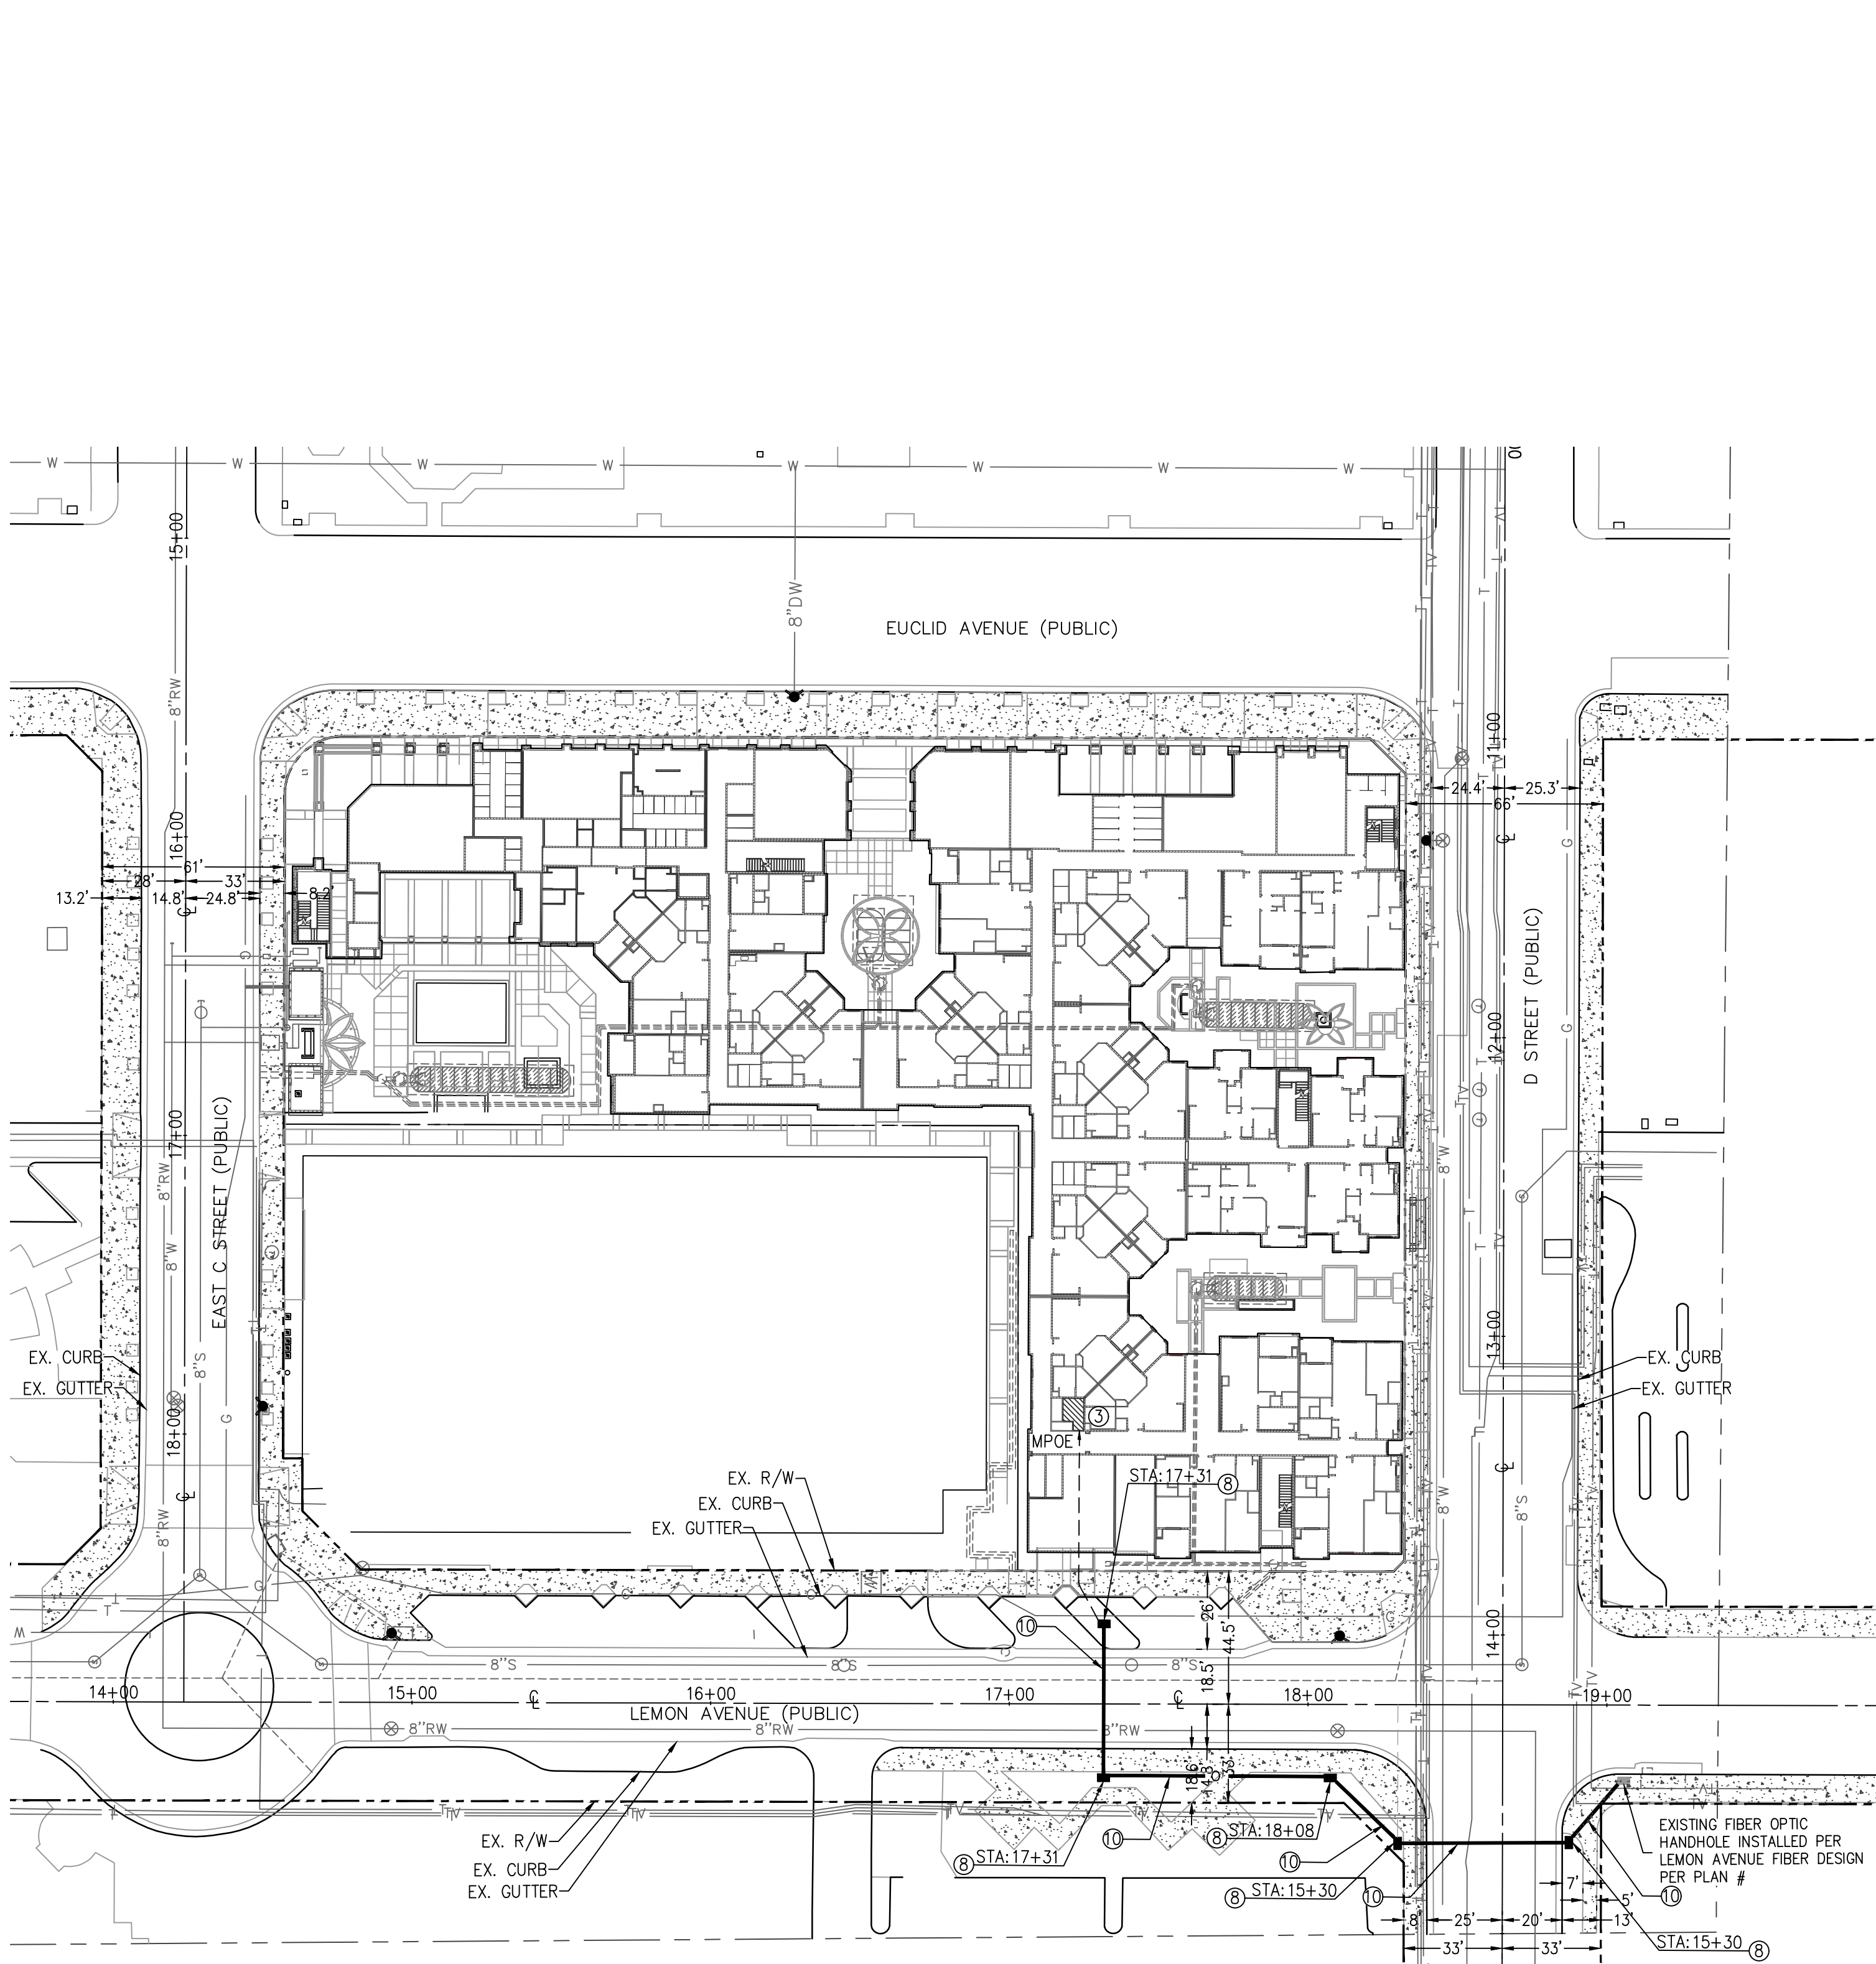


- CONSTRUCTION NOTES:
- 3 CONSTRUCT/INSTALL FIBER OPTIC CONDUIT AT A MINIMUM DEPTH OF 36". TRENCHING SHALL BE PER CITY STANDARD 1306. ONE (1)-2" HDPE SDR-11 (SMOOTHWALL) ROLL PIPE (1 ORANGE; 1-ORANGE WITH BLACK STRIPE) OR EQUIVALENT. ALL UNUSED CONDUITS/DUCTS/MICRODUCTS SHALL BE PROTECTED WITH DUCTS PLUGS THAT PROVIDE A POSITIVE SEAL. DUCTS THAT ARE OCCUPIED SHALL BE PROTECTED WITH INDUSTRY ACCEPTED DUCT SEAL COMPOUND. CONDUIT BANK REQUIRES (1) 12AWG HIGH STRENGTH (MIN. BREAK LOAD 452#) COPPER-CLAD STEEL W/30MIL HDPE ORANGE INSULATION FOR LOCATE/TRACER WIRE.

8 INSTALL FIBER OPTIC HANDHOLE HH-3/22 (PCA304836-90244) NEWBASIS; LESS THAN OR EQUAL TO 432 STRANDS. PER CITY STANDARD 1316. CONDUITS SWEEPING INTO HANDHOLES SHALL ENTER IN FLUSH WITH THE CUT OUT MOUSE HOLES ALIGNED PARALLEL TO THE BOTTOM OF THE BOX AND COME IN PERPENDICULAR TO THE WALL OF THE BOX. CONDUITS SHALL NOT ENTER AT ANY ANGLE OTHER THAN PARALLEL. PROVIDE 5' MIN CLEARANCE FROM EXISTING/PROPOSED UTILITIES. ALL HANDHOLES WILL HAVE 1/4 INCH GALVANIZED WIRE BETWEEN THE HANDHOLES AND THE GRAVEL ITS PLACED ON.

10 CONSTRUCT/INSTALL FIBER OPTIC CONDUIT AT A MINIMUM DEPTH OF 36". TRENCHING SHALL BE PER CITY STANDARD 1306. TWO (2)-2" HDPE SDR-11 (SMOOTHWALL) ROLL PIPE (1 ORANGE 1-ORANGE WITH BLACK STRIPE) OR EQUIVALENT. ALL UNUSED CONDUITS/DUCTS/MICRODUCTS SHALL BE PROTECTED WITH DUCTS PLUGS THAT PROVIDE A POSITIVE SEAL. DUCTS THAT ARE OCCUPIED SHALL BE PROTECTED WITH INDUSTRY ACCEPTED DUCT SEAL COMPOUND. CONDUIT BANK REQUIRES (1) 12AWG HIGH STRENGTH (MIN.BREAK LOAD 452#) COPPER-CLAD STEEL W/30MIL HDPE ORANGE INSULATION FOR LOCATE/TRACER WIRE.
- NOTE: CONTRACTOR SHALL APPLY AND INSTALL AN APPROVED NON-DETECTABLE WARNING TAPE 18" ABOVE THE UPPERMOST CONDUIT WHEN BACKFILLING TRENCHES, PITS, OR EXCAVATIONS GREATER THAN 10' IN LENGTH. WARNING TAPE SHALL BE NON-DETECTABLE, ORANGE IN COLOR, 4-INCH MINIMUM WIDTH, 4 MIL, 500% MINIMUM ELONGATION, WITH BOLD PRINTED BLACK LETTERS "CAUTION-BURIED FIBER OPTIC CABLE BELOW" PRINTED NO LESS THAN 2-INCH HIGH.

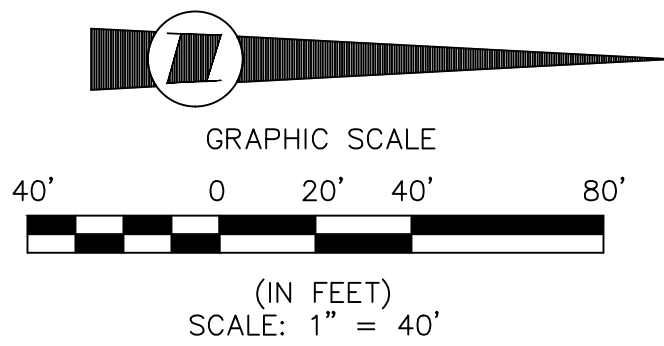

CONSTRUCTION LEGEND			
	PROPOSED FIBER CONDUITS		EXISTING FIRE HYDRANT
	PROPOSED FIBER SERVICE		EXISTING WATER VALVE
	PROPOSED FIBER HANDHOLE		EXISTING MANHOLE
	EXISTING FIBER HANDHOLE		EXISTING WATER METER
	EXISTING FIBER CONDUIT		EXISTING 8" SANITARY SEWER
	STREET ROW		EXISTING 8" DOMESTIC WATER
	PROPERTY LINE		EXISTING 8" RECYCLED WATER
	CENTERLINE		EXISTING 18"/24"/36"/42" RCP
	SIDEWALK		STORM DRAIN